



Parameters	Specification	Unit
Center frequency (Fo)	862.000	MHz
Bandwidth	14000	kHz
Insertion Loss in BW, max	3.0	dB
Attenuation, min	820 MHz ~ 822 MHz	-37
	822 MHz ~ 842 MHz	-31
	882 MHz ~ 884 MHz	-33
	902 MHz ~ 904 MHz	-38
Input Power, Max	10	dBm
In/Out Impedance	50	$\Omega$
Operating temperature range	-40 to +85	$^{\circ}\text{C}$
Storage Temperature	-40 to +85	$^{\circ}\text{C}$

### Dimension

TOP VIEW




BOTTOM VIEW



Pin Number	Function
1	Input
2	GND
3	Output
4	GND

### Frequency Characteristics

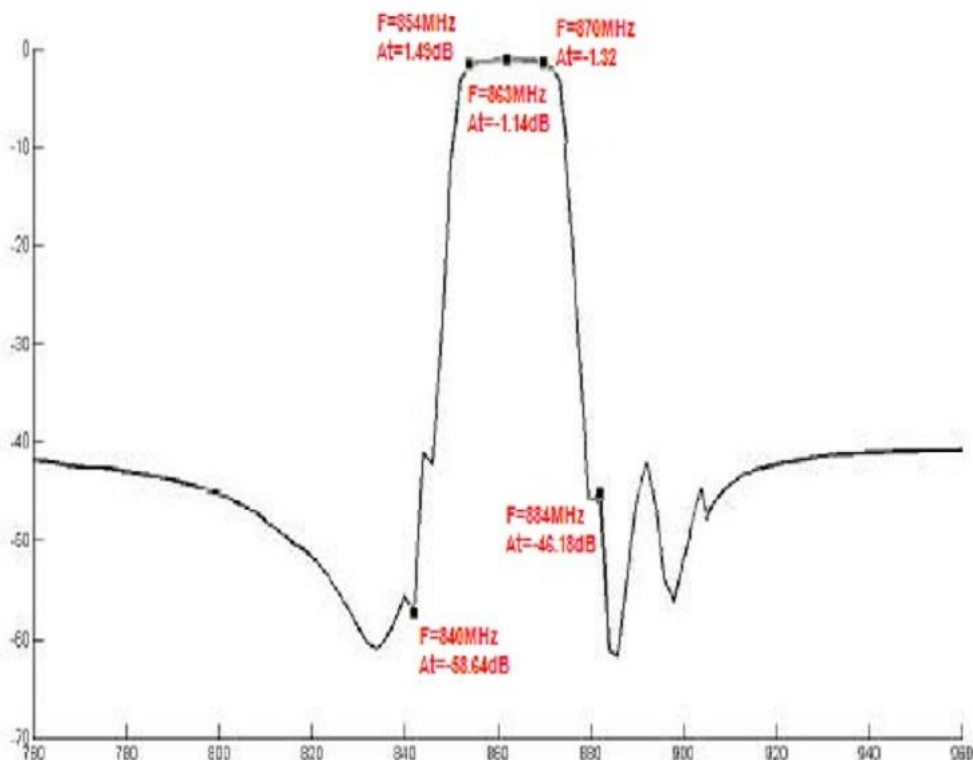

### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
TERMINATION FINISH	Au
REACH – SVHC	Compliant
RoHS 2	6/6
PACKAGING	TAPE & REEL



#### APPROVAL

DRAWN BY	LP, March 08, 2016
APPROVED BY	CP, March 08, 2016
REVISION	A, Initial Release



A **RAMI TECHNOLOGY** Company

## RF SAW FILTER RSF-862.000-14000-2015-TR

---

page 3 of 3  
application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.