



Items	Specification	Unit
Center Frequency (between 3 dB points, Fo)	868.350	MHz
Insertion Attenuation , typ/max	4.0 / 5.0	dB
3dB Passband	1.6±0.2	MHz
Ripple in Passband (916.5±0.3MHz), typ/max	0.5 / 1.0	dB
Attenuation, min/typ	10 ~ 700 MHz	-50 / -55
	700 ~ 830 MHz	-40 / -50
	830 ~ 850 MHz	-35 / -45
	850 ~ 864.4 MHz	-20 / -32
	870.4 ~ 877.4 MHz	-21 / -25
	877.4 ~ 882.4 MHz	-15 / -35
	882.4 ~ 900 MHz	-28 / -35
900 ~ 1000 MHz	-40 / -45	
Input power, max	15	dBm
Operating Temperature Range	-40 to +85	°C
Storage Temperature Range	-40 to +85	°C

Dimension

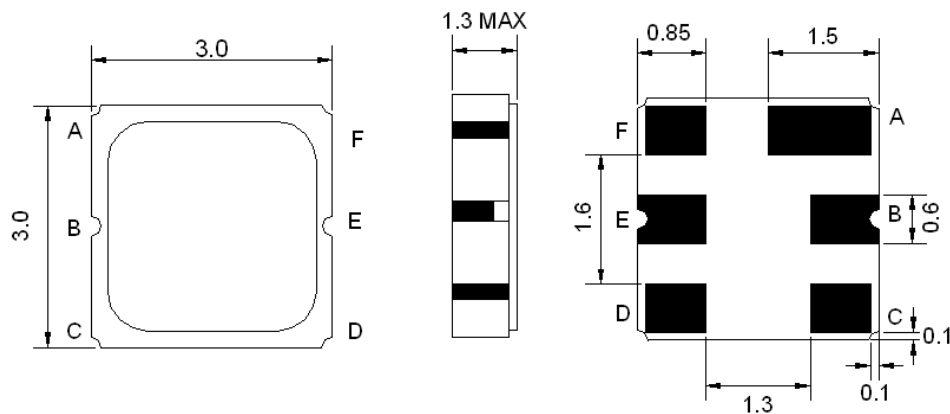

Pin Description	
A, C, D, F	Ground
B	In
E	Out

Frequency Characteristics

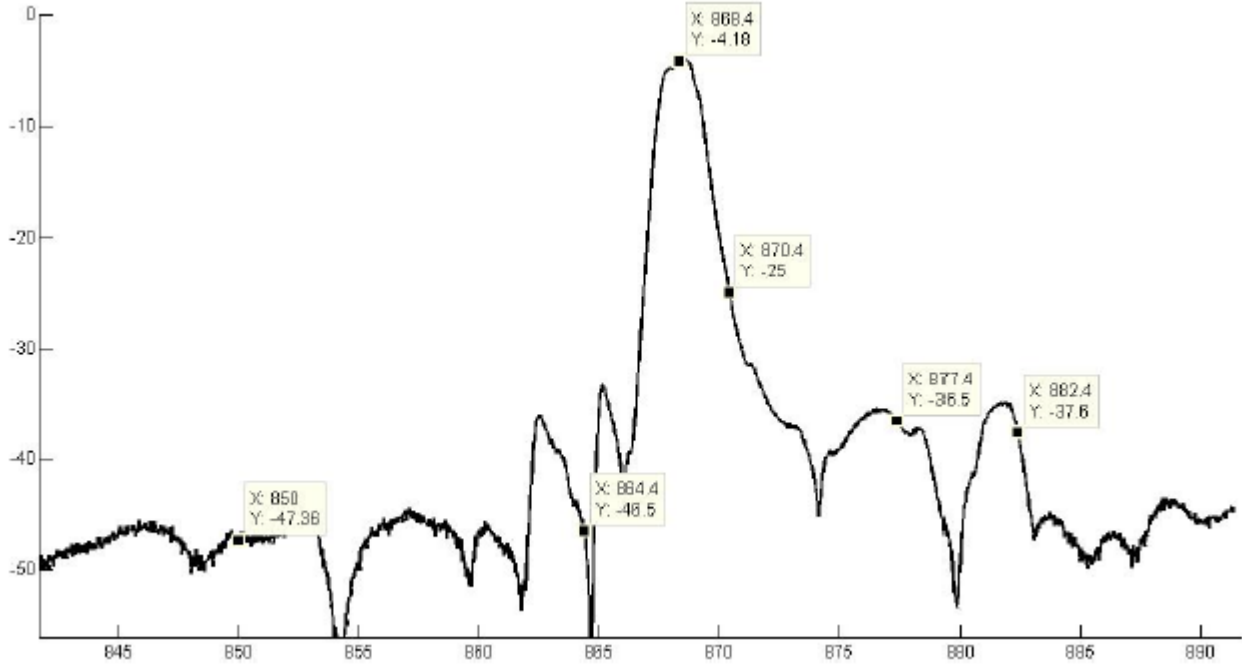

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

APPROVAL

DRAWN BY	CP, February 03, 2016
APPROVED BY	CP, February 03, 2016
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.