


Items	Specification	Unit	
Center frequency(Fo)	868.500	MHz	
Bandwidth	4000	KHz	
Insertion Loss in BW	6.0	dB max	
3 dB Bandwidth, typical	5.5	MHz	
Pass band Ripple	2.0	dB max	
Absolute Delay, typical	200	nsec	
Group Delay Ripple	350	nsec max	
Relative Attenuation	858.50 MHz	45	dB min
	863.50 MHz	25	dB min
	873.50 MHz	25	dB min
	878.50 MHz	45	dB min
In/Out Impedance	50 Ω		
Input power Maximum	10 dBm		
DC Voltage Maximum	10 VDC		
Operation Temperature	-40°C to +85°C		
Storage Temperature	-40°C to +85°C		


Dimension

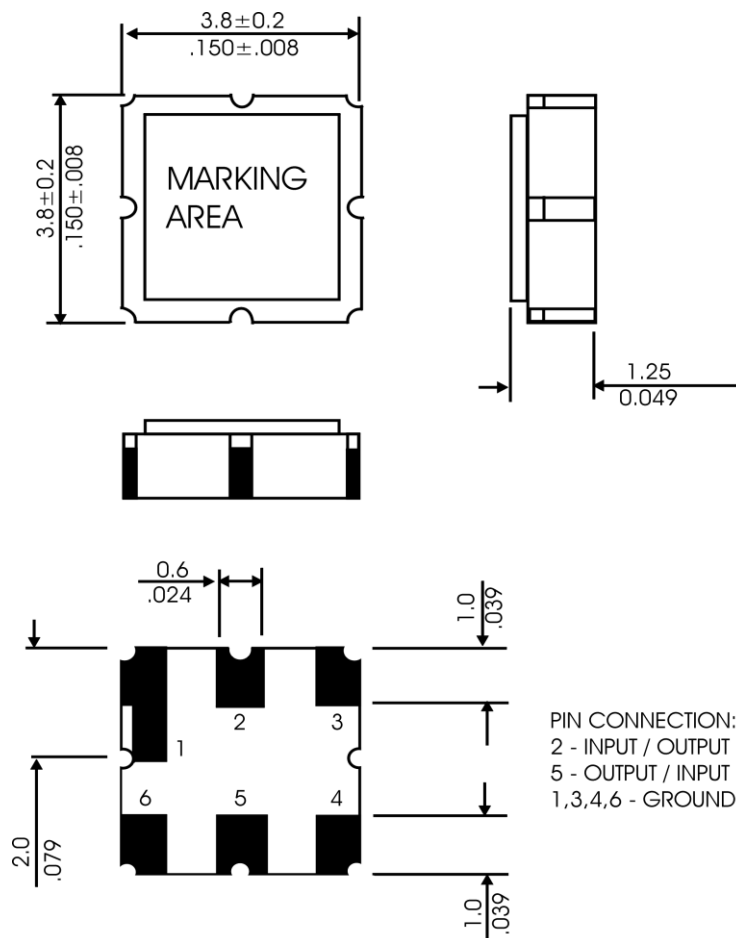

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Frequency Characteristics

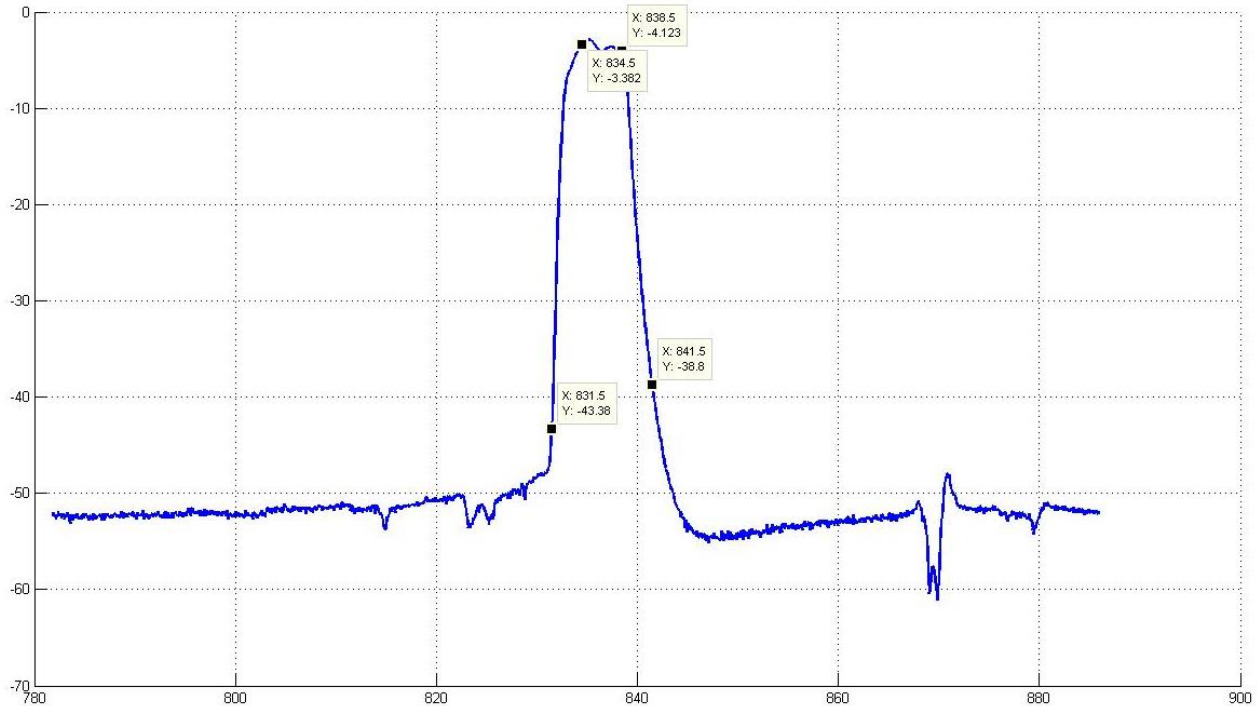

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.