


Items		Specification	Unit
Center frequency (Fo)		879.000	MHz
Bandwidth		30000	KHz
Insertion Loss in BW		3.0	dB Max
Amplitude Variation (864~864 MHz)		1.0	dB max
Group Delay Ripple, typical		30	nsec
Relative Attenuation	10 MHz ~ 705 MHz	50	dB min
	705 MHz ~ 755 MHz	48	dB min
	755 MHz ~ 805 MHz	47	dB min
	912 MHz ~ 939 MHz	18	dB min
	939 MHz ~ 979 MHz	35	dB min
	979 MHz ~ 1035 MHz	43	dB min
	1035 MHz ~ 2600 MHz	25	dB min
RF Power		15 dBm Max	
DC Voltage		12 V Max	
In/Out Impedance		50 Ω	
Operation Temperature		-40°C to +55°C	
Storage Temperature		-40°C to +85°C	

### Dimension

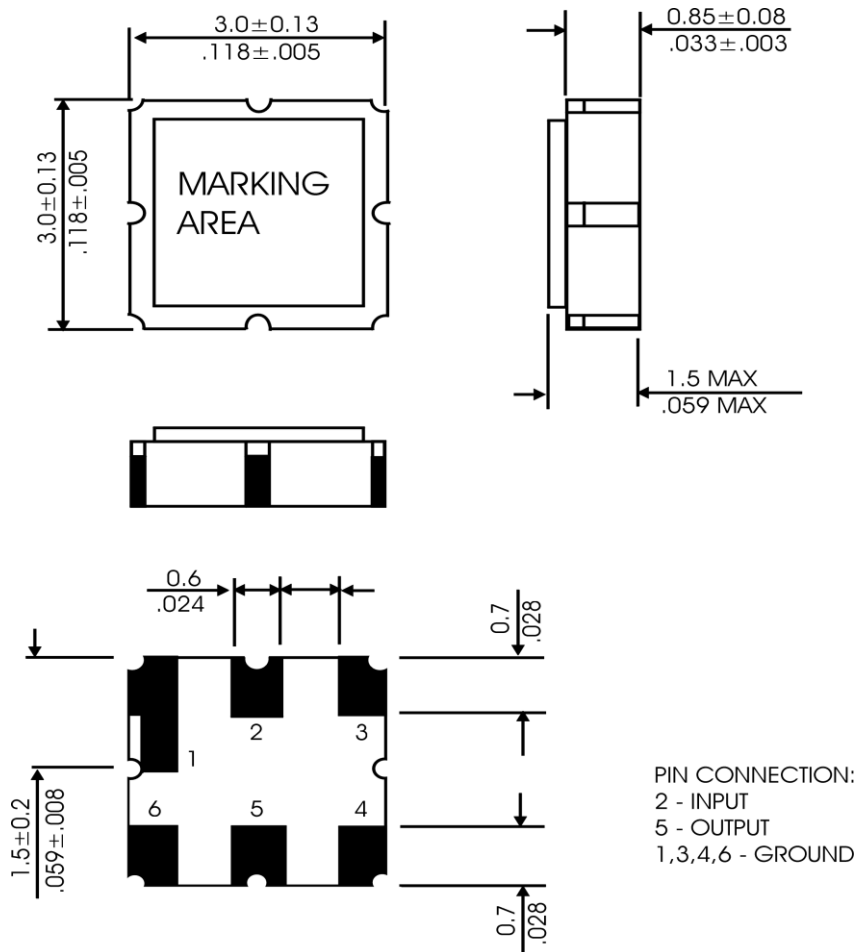

**Environmental**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.