



Items	Specification	Unit
Center frequency(Fo)	915.000	MHz
Insertion Loss	914 ~ 916 MHz, max	4.5
	870 ~ 874 MHz, min	40
	892 ~ 895 MHz, min	30
	935 ~ 938 MHz, min	30
	956 ~ 961 MHz, min	40
Amplitude Ripple (914~916MHz), max	1.5	dB
In/Out Impedance	50	Ω
Input power, max	10	dBm
Operating Temperature Range	-40 to +85	$^{\circ}\text{C}$
Storage Temperature Range	-40 to +85	$^{\circ}\text{C}$

Dimension

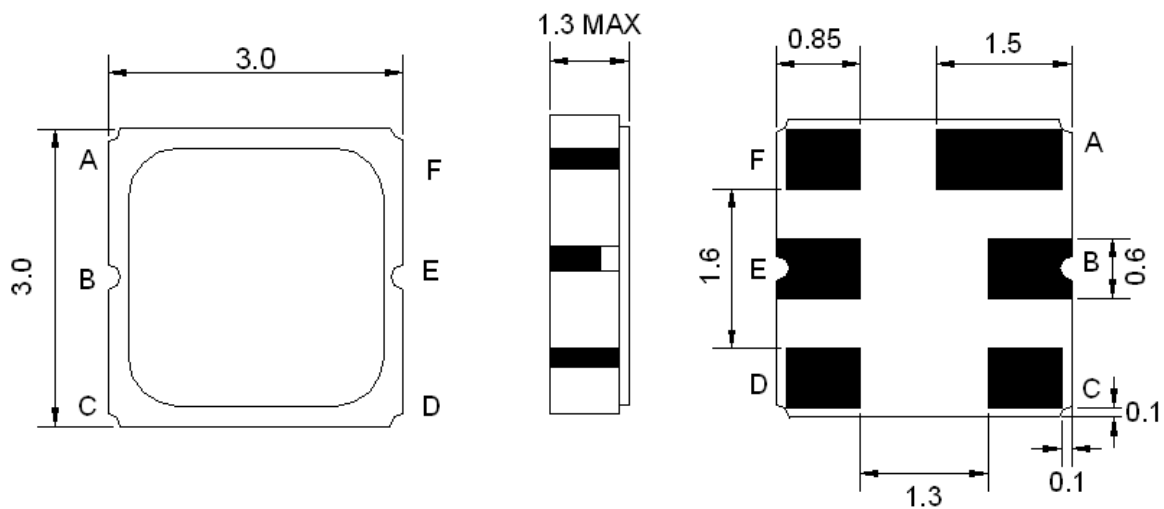


Pin Description	
A, C, D, F	Ground
B	In
E	Out

Frequency Characteristics

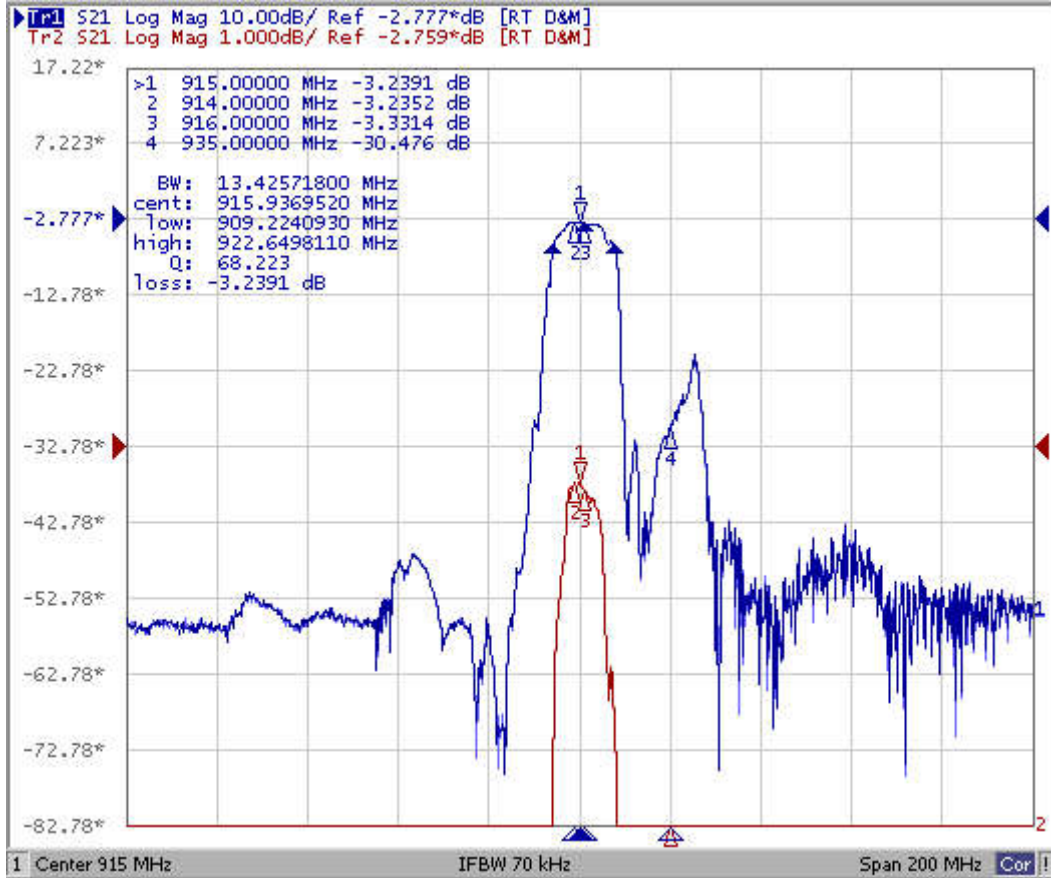

REFLOW PROFILE

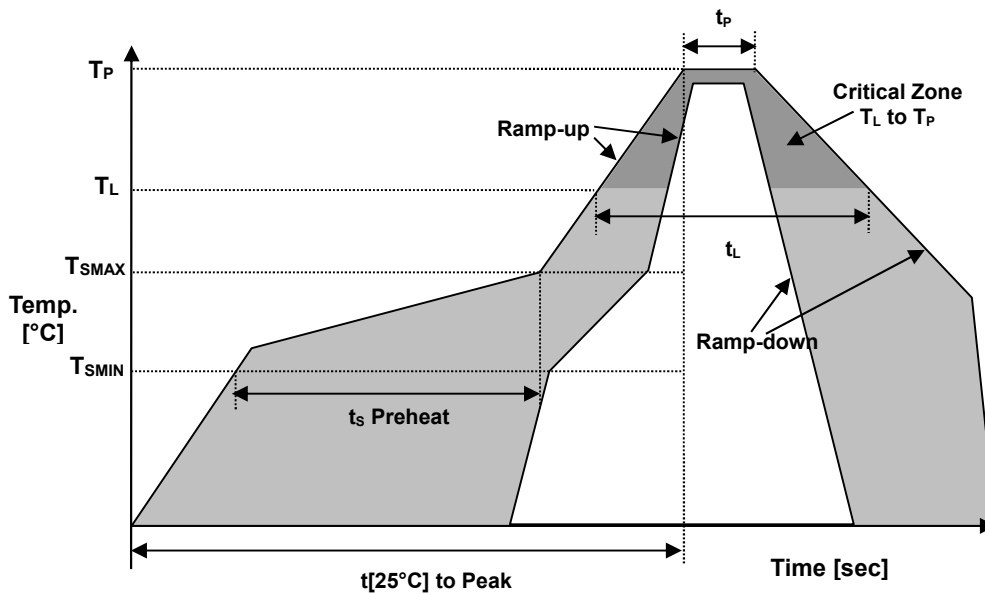

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_S	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_P	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t_L	60-150 sec.

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

April 2016