

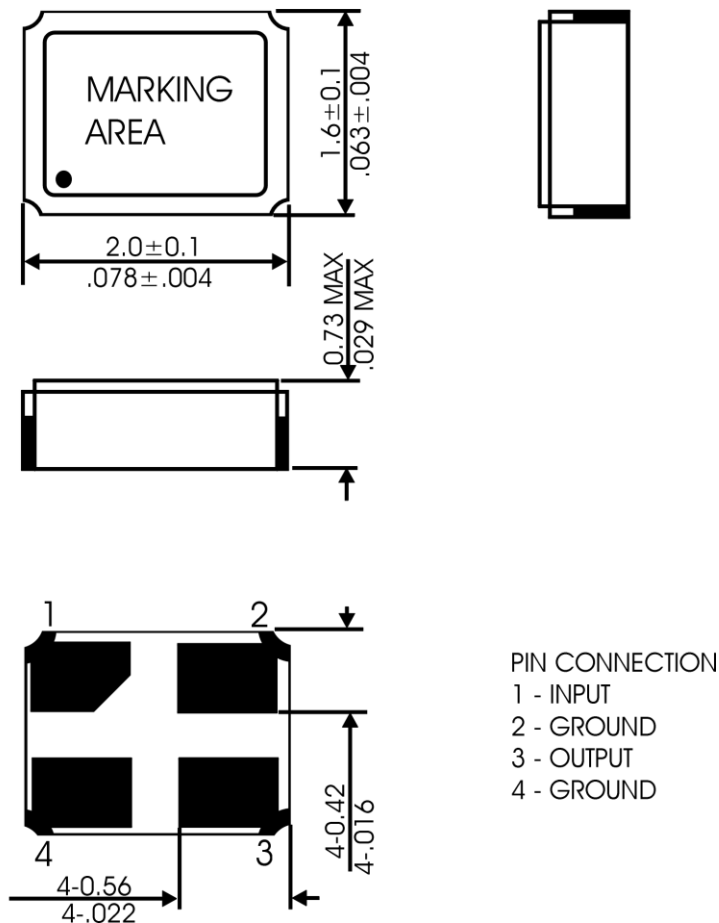


Items	Specification	Unit
Center frequency (Fo)	915.000	MHz
Bandwidth	26000	KHz
Insertion Loss in BW	3.0	dB Max
Amplitude Ripple	1.8	dB Max
Absolute Attenuation	10 MHz ~ 845 MHz	39 dB min
	845 MHz ~ 880 MHz	35 dB min
	970 MHz ~ 1020 MHz	35 dB min
	1020 MHz ~ 1200 MHz	35 dB min
	1200 MHz ~ 2000 MHz	35 dB min
	2000 MHz ~ 3000 MHz	25 dB min
Maximum Input Power	10 dBm Max	
DC Voltage	5 V Max	
In/Out Impedance	50 Ω	
Operation Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +85°C	



### Dimension

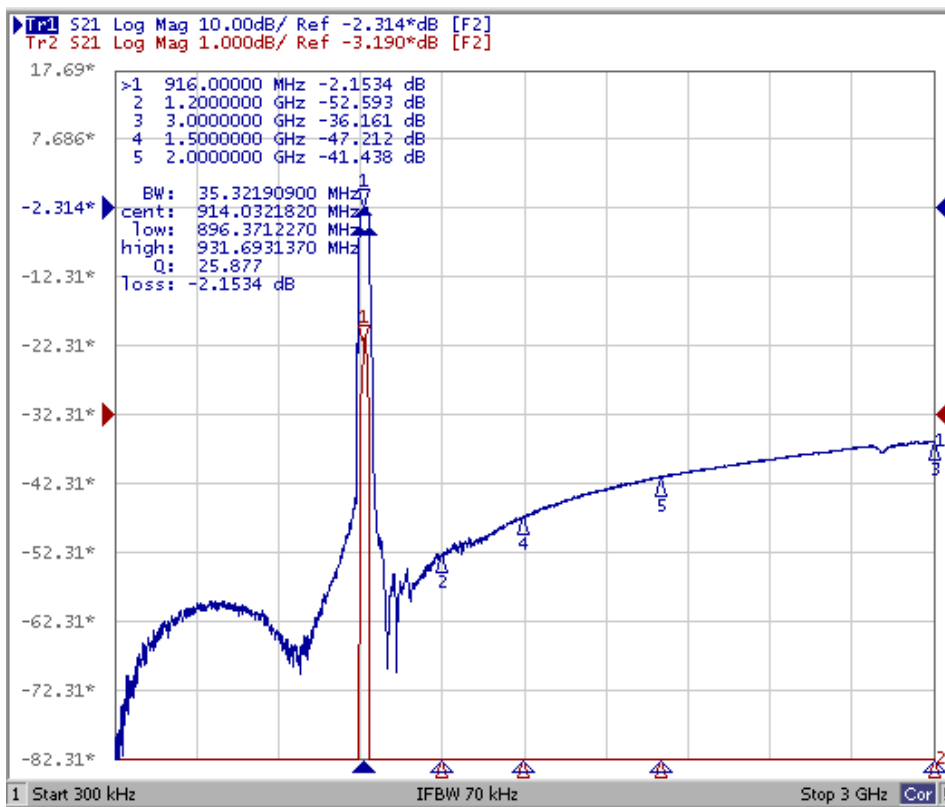

### Typical Frequency Characteristics

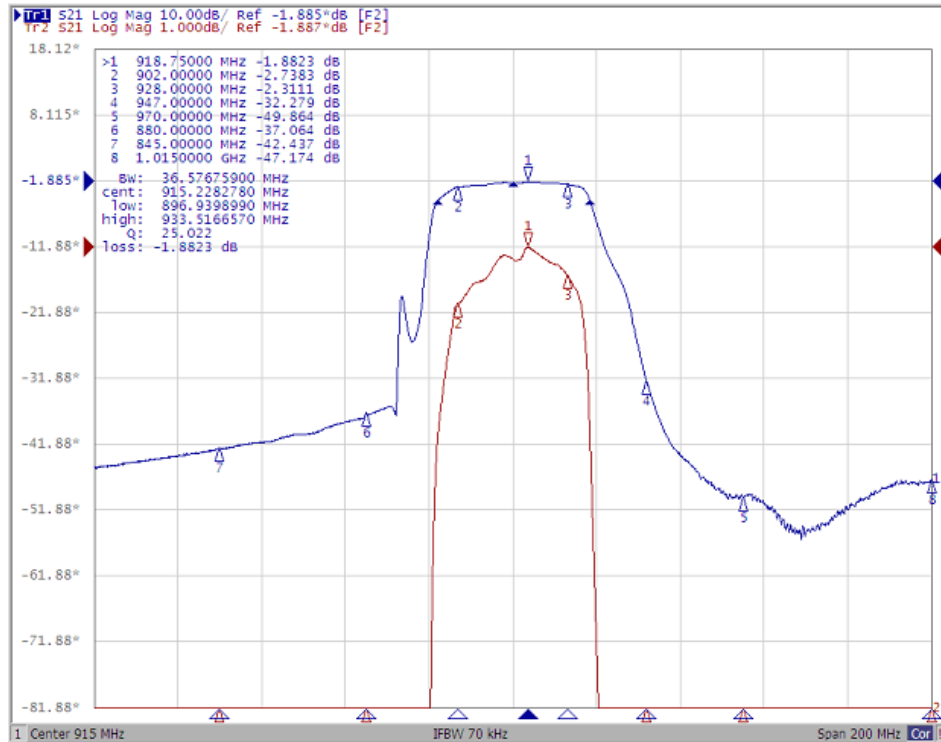

### Typical Frequency Characteristics - Continued

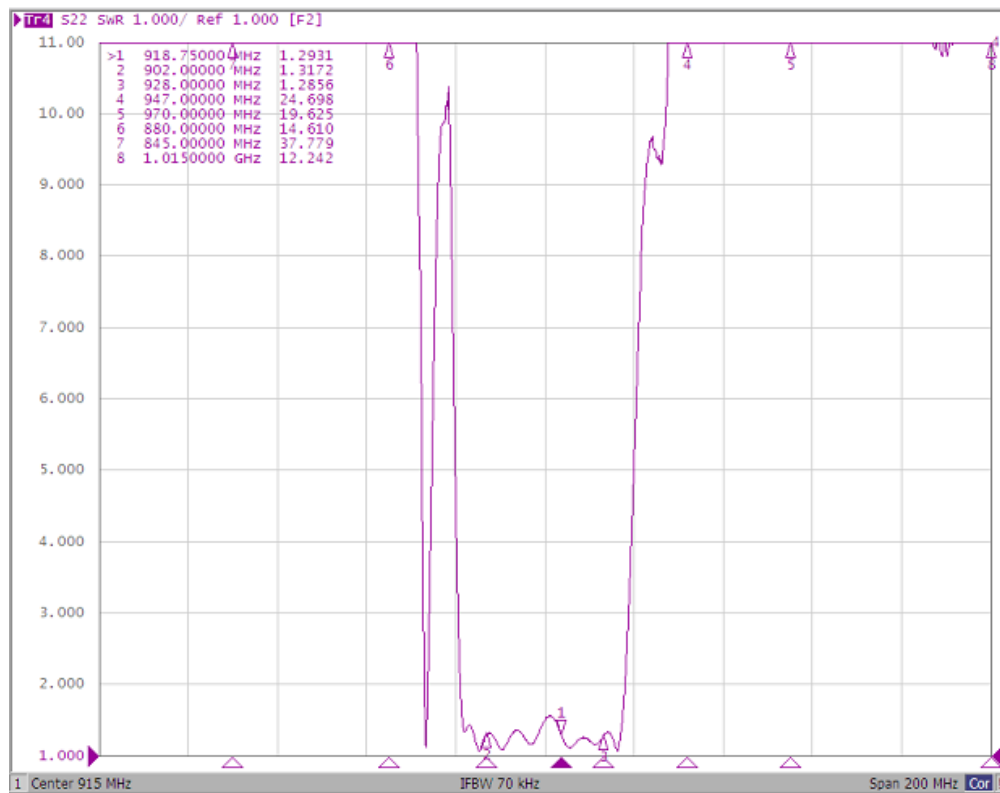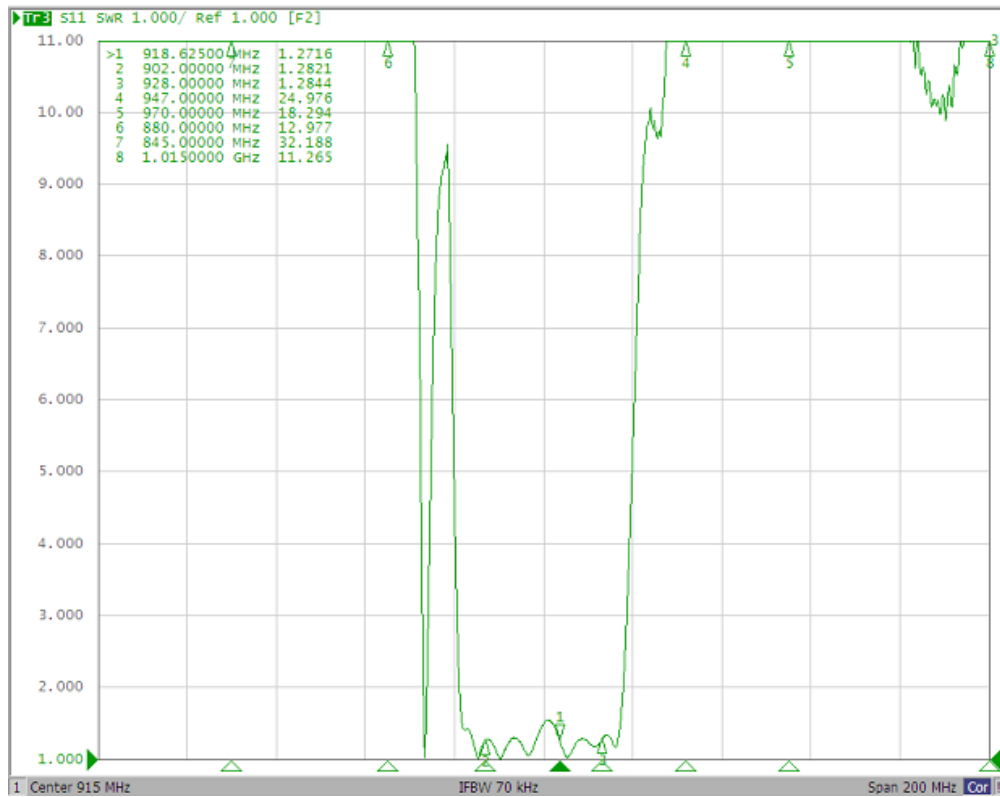

### Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

### ● APPROVAL

DRAWN BY	F. Parra, 10 March 2014
APPROVED BY	F. Parra, 10 March 2014
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.