



Items		Specification	Unit
Center frequency (Fo)		921.500	MHz
Bandwidth		13000	KHz
Insertion Loss in BW		3.2	dB Max
Amplitude Ripple		1.0	dB Max
Group Delay Variation		50	ns p-p
Input/Output Return Loss		10	dB min
Absolute Attenuation	0.3 MHz ~ 857.5 MHz	40	dB min
	857.5 MHz ~ 895 MHz	35	dB min
	970 MHz ~ 1005 MHz	35	dB min
	1005 MHz ~ 1110 MHz	40	dB min
	1110 MHz ~ 3000 MHz	30	dB min
Maximum Input Power		10 dBm Max	
DC Voltage		10 V Max	
In/Out Impedance		50 Ω	
Operation Temperature		-40°C to +85°C	
Storage Temperature		-40°C to +85°C	

### Dimension

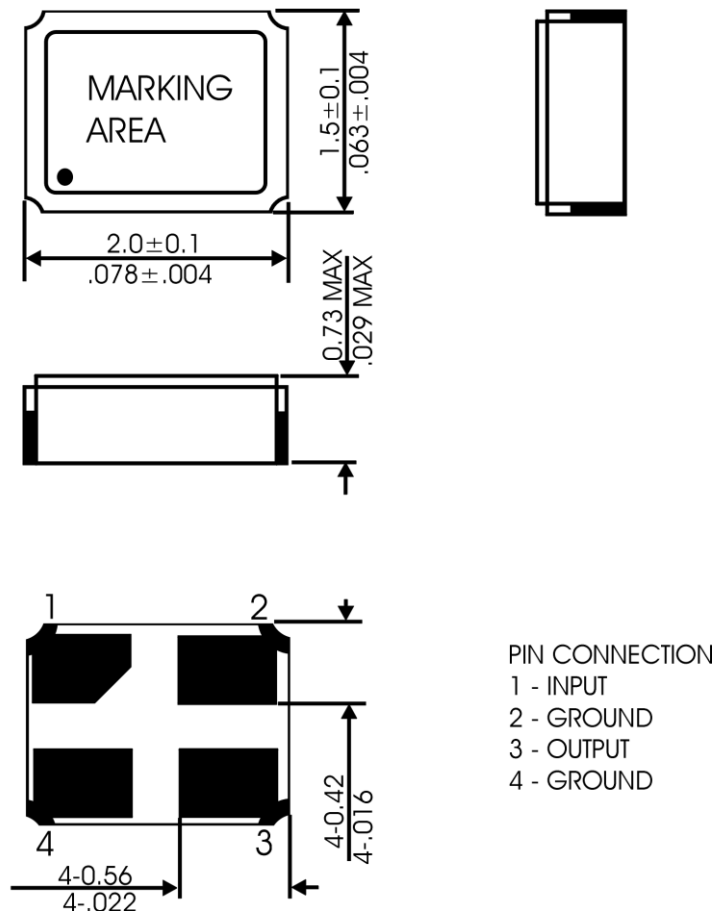

**Typical Frequency Characteristics**

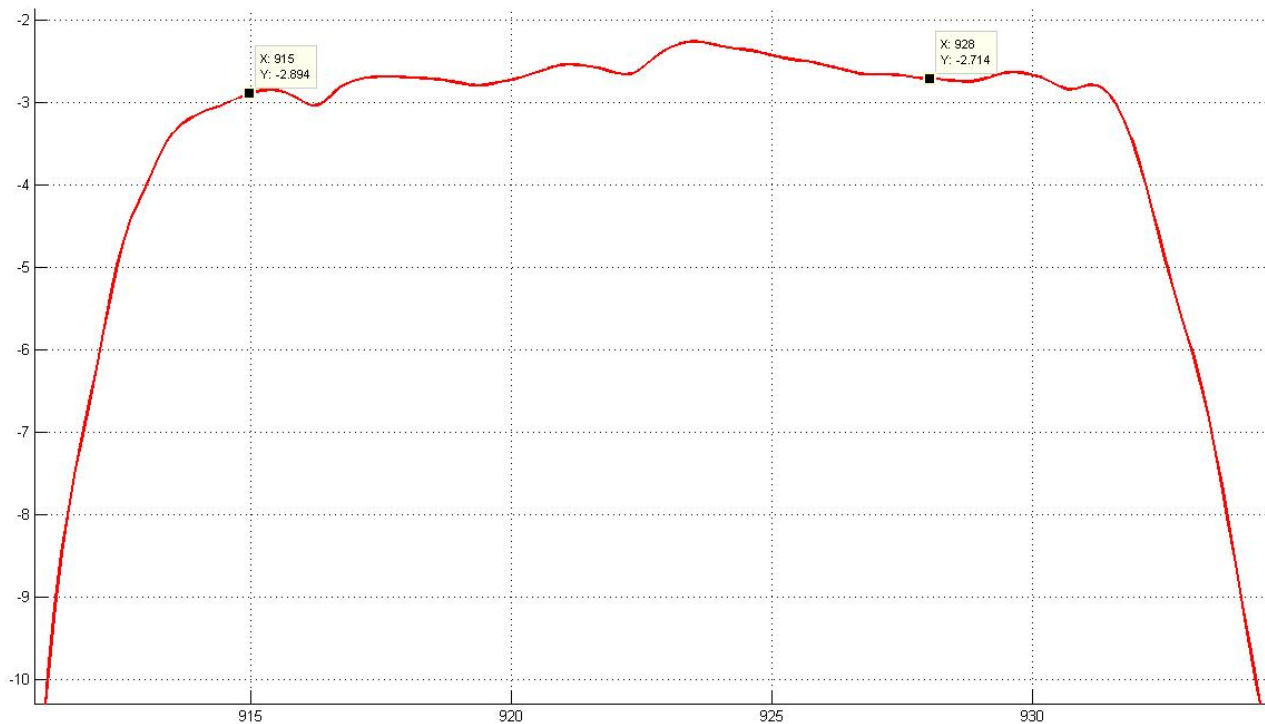

**Environmental**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

● **APPROVAL**

DRAWN BY	F. Parra, 31 October 2014
APPROVED BY	F. Parra, 31 October 2014
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.