

● RF MODULE

- RF Remote Control for Automatic Garage Door Opener, Satellite Dish
- Security Systems

RSR - USA

Part Number	Channels	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-83.00-80-B	5	77.24 ± 0.08	4.0 max	4.5 ± 1	± 7	D
	6	83.24 ± 0.08		4.2 ± 1		
RSR-55.00-80-B	2	55.24 ± 0.08	6.0 max	3.6 ± 1	± 8	D
	3	61.24 ± 0.08		3.7 ± 1		
RSR-61.00-80-S	3	61.24 ± 0.08	5.0 max	4.4 ± 1	± 8	C
	4	67.24 ± 0.08		4.2 ± 1		
RSR-211.00-15-S	13	211.24 ± 0.15	2.7 max	3.0 ± 1	± 8	C

RSR - EUROPE

Part Number	Channels	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-85.00-80-B	4	85.24 ± 0.08	3.0 max	4.2 ± 1	± 5	D
	5	93.24 ± 0.08		4.0 ± 1		
RSR-55.24-80-B	3	55.24 ± 0.08	5.0 max	4.8 ± 1	± 8	D
	4	62.24 ± 0.08		4.8 ± 1		
RSR-77.00-80-S	3	77.24 ± 0.08	4.5 max	3.1 ± 1	± 8	C
	4	85.24 ± 0.08		2.8 ± 1		

RSR - ASIA

Part Number	Channels	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-91.00-80-S	1	91.24 ± 0.08	3.0 max	4.0 ± 1	± 5	C
	2	97.24 ± 0.08		4.0 ± 1		

● KEYLESS ENTRY

- RF Remote Control for Automatic Garage Door Opener, Satellite Dish
- Security Systems

RSR - USA

Part Number	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-304.30-250-X	304.30 ± 0.25	2.5 max	4.0 max	±8	A / B / C
RSR-310.00-250-X	310.00 ± 0.25		4.0 max		
RSR-314.00-250-X	314.00 ± 0.25		3.2 max		
RSR-314.50-250-X	314.50 ± 0.25		3.2 max		
RSR-315.00-250-X	315.00 ± 0.25		3.2 max		
RSR-345.00-250-X	345.00 ± 0.25		3.2 max		
RSR-359.90-250-X	359.90 ± 0.25		3.2 max		



RSR - EUROPE

Part Number	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-417.50-250-X	417.50 ± 0.25	2.5 max	3.2 max	±8	A / B / C
RSR-418.00-250-X	418.00 ± 0.25		3.2 max		
RSR-423.22-250-X	423.22 ± 0.25		3.2 max		
RSR-432.92-250-X	432.92 ± 0.25		3.2 max		
RSR-433.92-250-X	433.92 ± 0.25		3.2 max		
RSR-433.42-250-X	433.42 ± 0.25		3.2 max		

RSR - ASIA

Part Number	Frequency in MHz	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics -10°C to 60°C (PPM/°C)	Figure
RSR-303.875-250-X	303.875 ± 0.25	2.5 max	4.0 max	± 8	A / B / C
RSR-320.65-250-X	320.65 ± 0.25		3.2 max		
RSR-479.50-250-X	479.50 ± 0.25		2.3 max		

● OUTLINE DRAWINGS

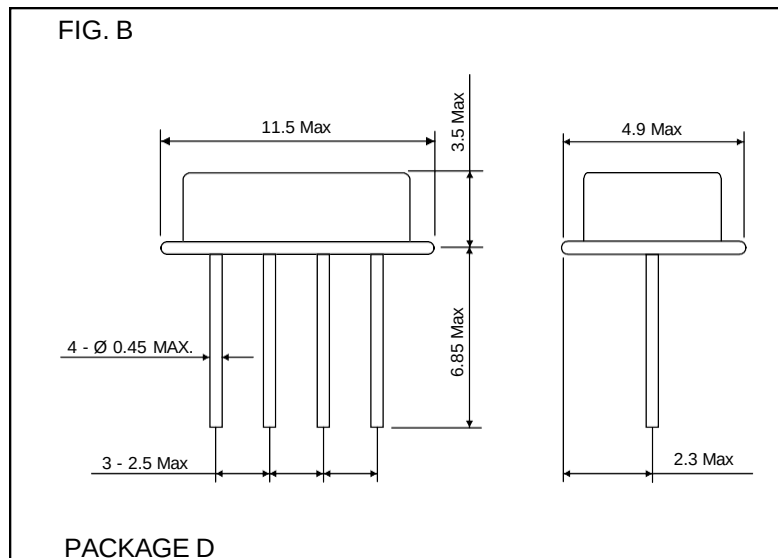
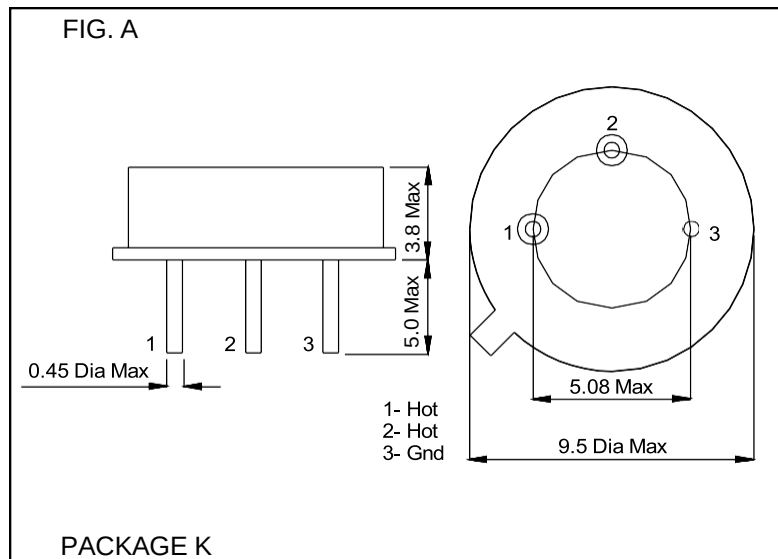


● PART NUMBERING SYSTEM

SERIES	-	FREQUENCY	-	TOLERANCE	-	PACKAGE(x)
RSR		in MHz		in KHz		see below

Example: RSR-433.92-250-K
Raltron Saw Resonator, 433.92 MHz, ± 250 KHz, PACKAGE K (FIG. A)

PACKAGE DESIGNATIONS	
K	FIG. A
D	FIG. B
S	FIG. C
B	FIG. D

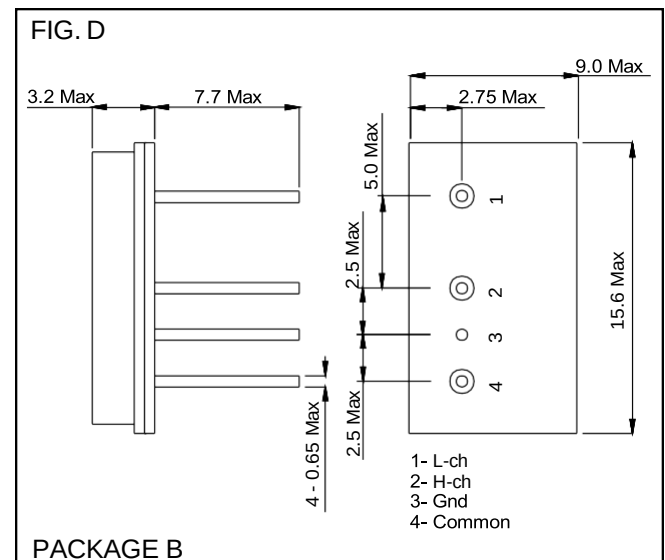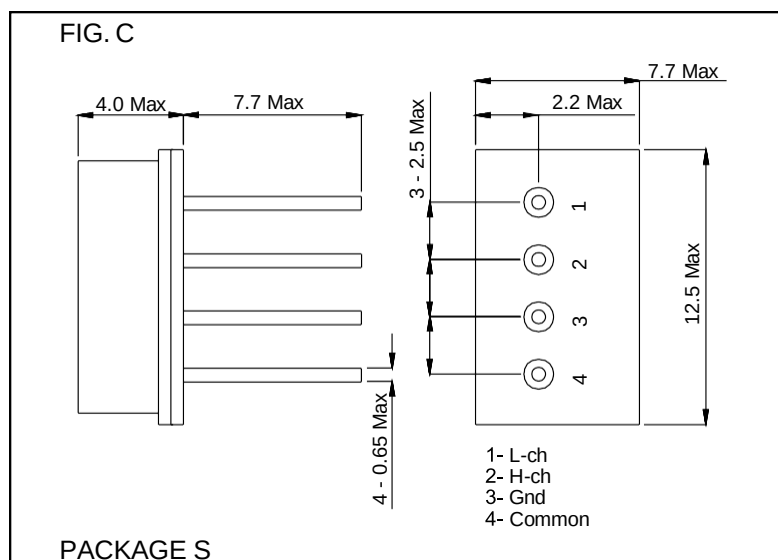

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.