

VSY SERIES: VCXO OSCILLATOR, HCMOS, +2.5 VDC, 7x5mm Package

DESCRIPTION: A crystal controlled, high frequency, highly stable, voltage controlled oscillator, adhering to HCMOS Standards. The output can be Tri-stated to facilitate testing or combined multiple clocks. The device is contained in a sub-miniature, very low profile, leadless ceramic SMD package with 6 gold contact pads. This miniature oscillator is ideal for today's automated assembly environments.

APPLICATIONS AND FEATURES:

- ⌚ Common Frequencies: 16.384 MHz; 19.44 MHz; 27 MHz; 38.88 MHz; 51.84 MHz; 77.76MHz; 123.6MHz
- ⌚ +2.5 VDC HCMOS
- ⌚ Frequency Range from 16 to 130 MHz
- ⌚ Miniature Ceramic SMD Package Available on Tape and Reel
- ⌚ Lead Free and ROHS Compliant

ABSOLUTE MAXIMUM RATINGS:

PARAMETER	SYMBOL	VALUE	UNIT
Operating temperature range	Ta	-40...+85	°C
Storage temperature range	T(stg)	-55...+90	°C
Supply voltage range	Vcc	-0.5...+4.6	VDC
Maximum Control Voltage	Vc	-0.5...Vcc+0.5	VDC
Maximum Output Voltage	Vo	-0.5...Vcc+0.5	VDC

ELECTRICAL PARAMETERS:

PARAMETER	SYMBOL	TEST CONDITIONS ^{*1}		VALUE	UNIT
Nominal Frequency	f _o			16.000 ~ 130.000	MHz
Supply Voltage	V _{cc}			+2.5 ±10%	VDC
Supply Current	I _s	Nominal V _{cc} , Nominal Load, +25 ±3°C	F _o =27MHz F _o =35MHz F _o =78MHz F _o =126MHz	4.0 MAX, 2.8 TYP 6.0 MAX, 4.2 TYP 9.0 MAX, 7.2 TYP 12 MAX 10 TYP	mA
Power supply rejection	PsRR	Frequency Change with V _{cc} varied ±10%		±1 MAX	ppm
Output Logic Type				HCMOS	
Load		Connected from output to ground		15	pF
Output Voltage Levels	V _{oh} V _{ol}			0.9●V _{cc} MIN 0.1●V _{cc} MAX	VDC VDC
Duty Cycle	DC	Measured at 50% of V _{cc}		40/60 to 60/40 or 45/55 to 55/45	%
Rise / Fall Time ^{*2}	t _r / t _f	Measured at 20/80% and 80/20% V _{cc} Levels	F _o <27MHz F _o >35MHz	3.0 MAX 2.4 TYP 2.5 MAX 2 TYP	ns
Jitter	J	RMS Period Jitter 1sigma 1000 samples ^{*4}		2.5 TYP	ps
Phase Jitter	J _p	RMS Phase Jitter integrated from 12KHz to 20MHz ^{*6}		0.6 TYP	ps
Phase Noise	E (Δf)	Typical measured at 100MHz ^{*5}	Δf =100Hz Offset Δf =1KHz Offset Δf =10KHz Offset Δf =100KHz Offset Δf =1MHz Offset	-80 -110 -130 -138 -145	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz
Control Voltage Range	V _C	Positive slope; 10% linearity MAX		0 to +2.5	VDC
Control Voltage sensitivity	Δf/f _c (ΔV _c)			100 TYP	ppm/V
Absolute Pull Range	APR	Minimum guaranteed freq. pull over Δf/f _c		See Part Numbering ^{*3}	ppm
Settability	V _{fo}			+1.25 ± 0.25	VDC
Input Impedance	Z _{in}	DC to 1KHz		2 MIN	MΩ
Modulation Bandwidth	BW	-3 dB		45 MIN	kHz
ESD protection		Human Body Model		2000 MIN	VDC
Pin 2 Output Enabled Output Disabled	En Dis	High Voltage or No Connect Ground		0.7●V _{cc} MIN 0.3●V _{cc} MAX	VDC VDC

- *1 Test Conditions Unless Stated Otherwise: Nominal Vcc, Nominal Load, +25 ±3°C
- *2 Frequency Dependent
- *3 Not All APR's Available With All Temperature Ranges—Consult Factory For Availability
- *4 Measured with Wavecrest SIA-3000A no filtering
- *5 Measured with Agilent 5500
- 6 Calculated from Agilent 5500 phase noise measurements


PART NUMBERING SYSTEM:

SERIES	SYMMETRY	TEMPERATURE RANGE (°C)	APR (ppm)	FREQUENCY (MHz)
VSY: VCXO with HCMOS Output	A: 40/60 to 60/40% T: 45/55 to 55/45%	R: 0...+50 S: 0...+70 U: -20...+70 V: -40...+85	F: ±32 ppm H: ±50 ppm	16.000...130.000

EXAMPLE: VSYASH-38.880


VCXO Oscillator, 7x5mm Package, +2.5 VDC Supply Voltage, HCMOS Output, 40/60% Symmetry, 0...+70°C Operating Temperature Range, ±50 ppm APR, 38.880 MHz, Enable High on Pin 2
Consult the factory for any custom requirements.

MECHANICAL PARAMETERS:

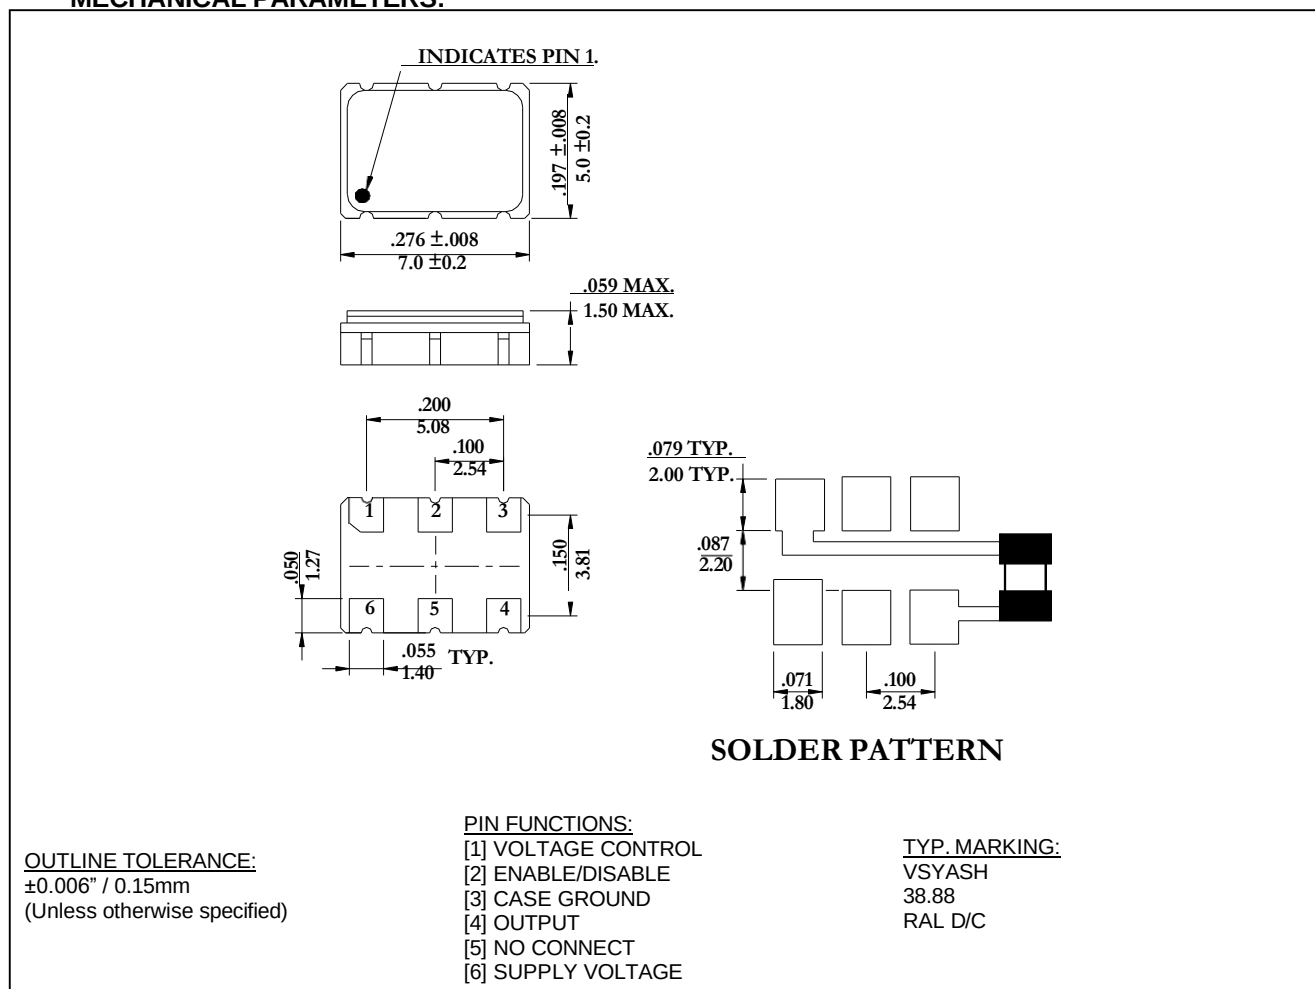

*0.01μF external by-pass filter is recommended as shown on solder pattern

• **REFLOW PROFILE**

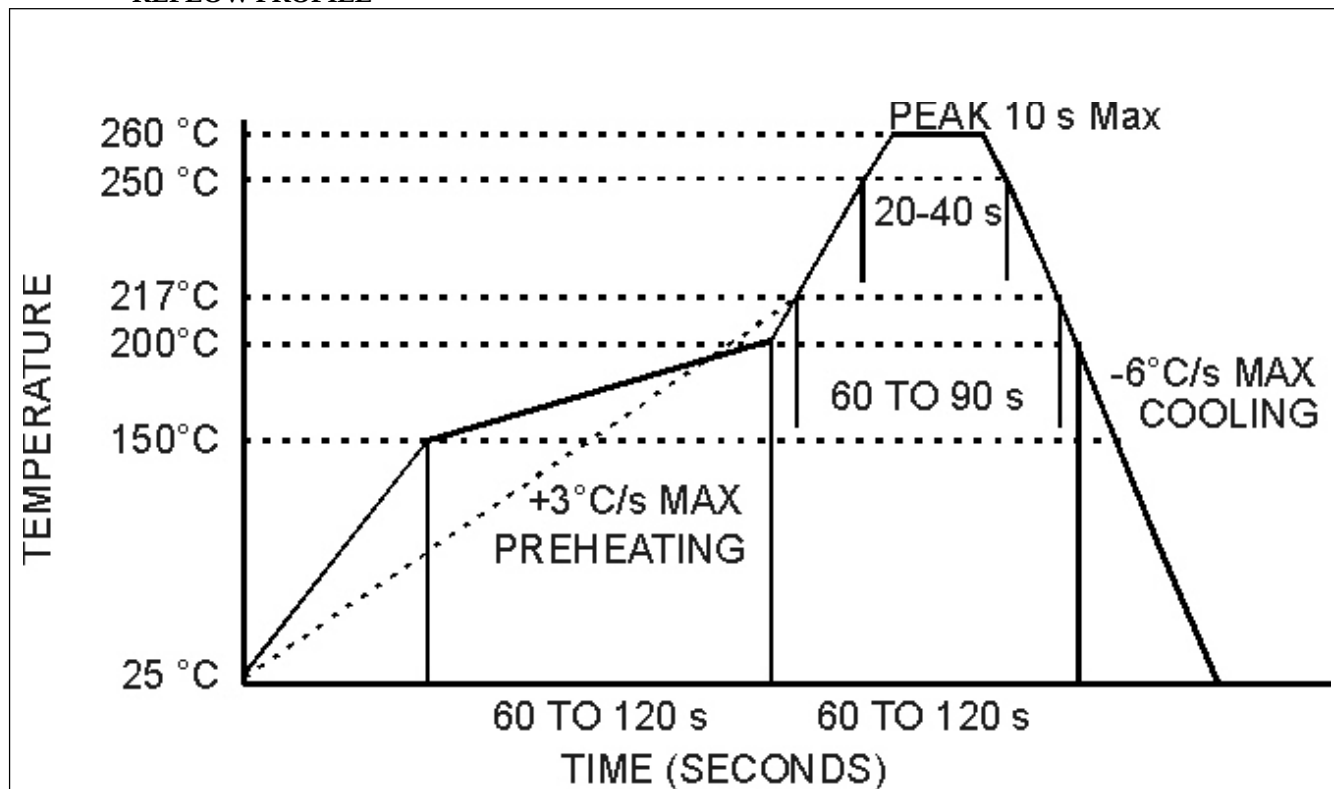

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.