

Frequency Components and Antennas for Electronic Shelf Label



Mar. 2023


The logo for RALTRON is displayed in a bold, black, sans-serif font. The letter 'O' is replaced by a solid blue circle. The logo is set against a white background with a thin black border.

Introduction



Raltron offers the most comprehensive line of frequency management components for Electronic Shelf Label, from simple tuning fork crystals to high stability temperature compensated crystal oscillators and antennas. These products are designed to satisfy the ultra-low power, small footprint, and low-cost requirements of this growing market.

What is Electronic Shelf Label?

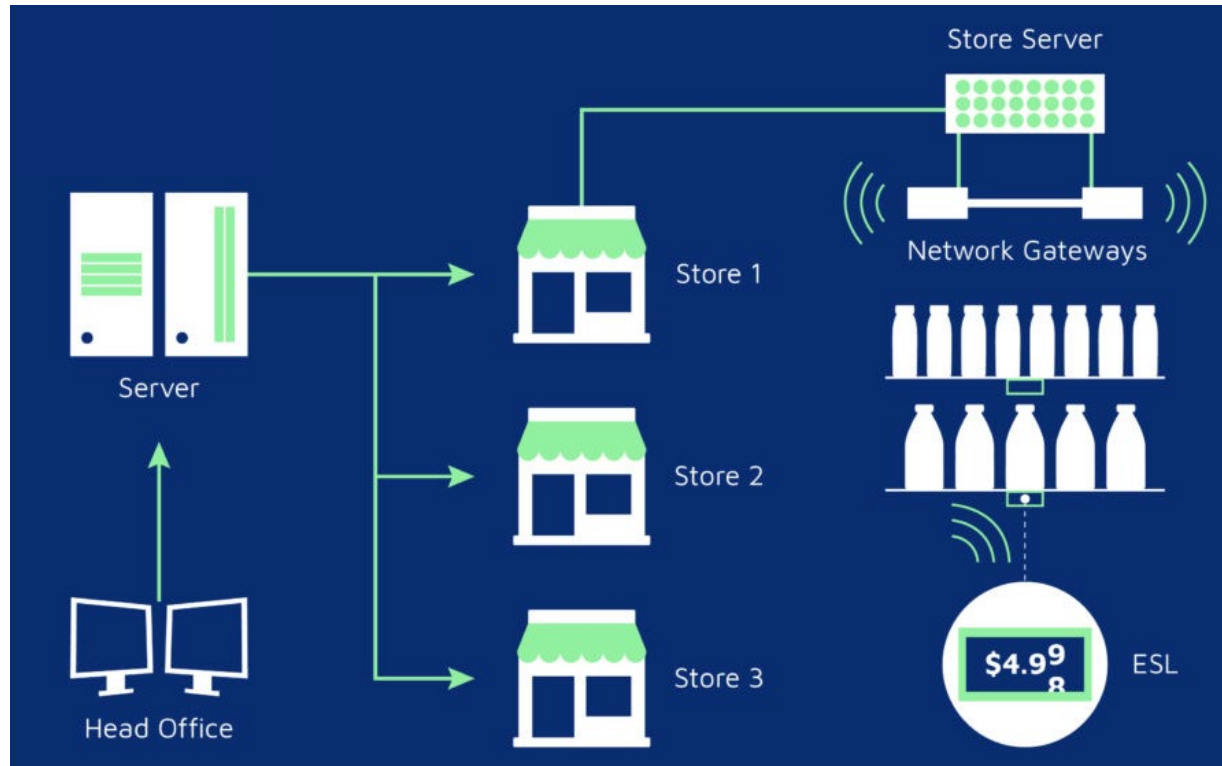

- Digital price tags for store shelves
- Replace traditional paper labels
- Display pricing and product information
- Update information wirelessly in real-time
- Communication protocols used:
 - Near Field Communication (NFC)
 - Bluetooth Low Energy (BLE)

Source: <https://www.telink-semi.com/benefits-electronic-shelf-label-retail/>

Solutions for Bluetooth & BLE Protocol

Bluetooth Low Energy uses the same 2.4 GHz radio frequencies as classic Bluetooth
Some Typical Crystal or TCXO frequencies for [Bluetooth & BLE](#) Electronic Shelf Label ICs:

Infineon - PSoC 6 MCU: CY8C63x6, CY8C63x7 - 16 MHz/32 MHz Crystal Oscillator
16 to 35 MHz, 32.768 kHz On-chip Crystal Oscillator
- 2.45 GHz Chip Antenna


Nordic Semiconductor - nRF52810 - 64 MHz Crystal Oscillator, 32 MHz Crystal
32.768 kHz Crystal Oscillator, 32.768 kHz Crystal
1 MHz/16 MHz/32 MHz Peripheral Clock
- 2.4 GHz Antenna

Texas Instruments - CC2640R2F - 32.8 kHz/48 MHz RC Oscillator, 24 MHz Crystal Oscillator
32.768 kHz Crystal Oscillator
- 2.4 GHz Antenna

NXP Semiconductors - MKW39/38/37 - 26 MHz/32 MHz Crystal, 32.768 kHz Crystal Oscillator
- 2.4 GHz Antenna

Dialog Semiconductor - DA1469x - 32 MHz Crystal, 32.768 kHz Crystal Oscillator
- 2.4 GHz Antenna

STMicroelectronics - BlueNRG-LPS - 32 MHz Crystal, 32.768 kHz Crystal
- 2.4 GHz Antenna

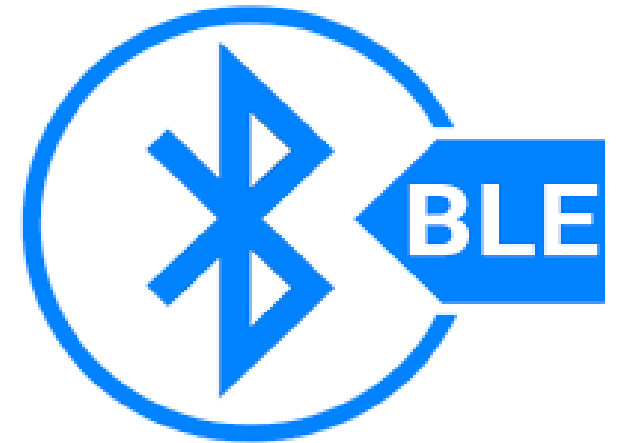

[See All Crystal Products](#)

[See Antenna Products for Bluetooth](#)

Solutions for Near-field communication Protocol

NFC operates at 13.56 MHz on ISO/IEC 18000-3 air interface. The technology is a simple extension of the ISO/IEC14443 proximity-card standard(contactless card, RFID).

Some Typical Crystal or TCXO frequencies for [Near-field communication](#) Electronic Shelf Label ICs:

NXP Semiconductors - PN7160_PN7161 - 27.12 MHz Crystal, 40 MHz Oscillator, 380 kHz Oscillator
PN7150 - 27.12 MHz Crystal, 40 MHz Oscillator, 380 kHz Oscillator
- 1 GHz VCOs

STMicroelectronics - ST25R3916 - 27.12 MHz Crystal, 27 kHz RC Oscillator, 32.768 kHz Crystal
ST25RU3993 - 20 MHz TCXO
ST95HF - 27.12 MHz Crystal
- 1800 MHz VCOs



[See All Crystal Products](#)

Raltron Solutions - Crystals and Oscillators

Available Crystal Packages



Part #	SIZE(mm)	FREQUENCY(MHz)
RH100-16-12-1015-EXT-TR	3.20 x 2.50 x 0.70	16
RH100-26.000-8-F-1015-EXT-TR-NS 50Ω	3.20 x 2.50 x 0.70	26
R2520-26.000-8-F-1015-EXT-TR-NS 50Ω	2.50 x 2.00 x 0.65	26
R2520-27.120-10-F-2030-EXT-TR	2.50 x 2.00 x 0.65	27.12
R2520-32.000-7-2020-EXT-TR	2.50 x 2.00 x 0.65	32
RH100-32.000-10-F-1010-TR	3.20 x 2.50 x 0.70	32
R2016-48.000-8-F-1030-EXT-TR	2.00 x 1.60 x 0.50	48
R2016-48.000-7.5-F-1010-TR	2.00 x 1.60 x 0.50	48
RH100-64.000-10-F-1015-EXT-TR-NS 40Ω	3.20 x 2.50 x 0.70	64

Available Oscillator Packages

Part #	SIZE(mm)	FREQUENCY(MHz)
CO2520-0.032768-3.3-50-X-T-TR	2.50 x 2.00 x 1.00	0.032768
COM1-0.032768-3.3-50-X-T-TR	3.20 x 2.50 x 1.20	0.032768

RH100 Specifications

PARAMETER	VALUE
FREQUENCY RANGE	8.000 MHz to 156.250 MHz
MODE OF OSCILLATION	FUNDAMENTAL
	THIRD OVERTONE
FREQUENCY TOLERANCE AT 25°C	±100 ppm max (±10 ppm, ±20 ppm and ±50 ppm available)
FREQUENCY STABILITY OVER TEMPERATURE	±100 ppm max (±10 ppm, ±20 ppm and ±50 ppm available)
OPERATING TEMPERATURE RANGE	-20°C to +70°C Standard -40°C to +85°C Extended
STORAGE TEMPERATURE RANGE	-40°C to +85°C
AGING	±2 ppm 1st year max
LOAD CAPACITANCE	6 pF to 32 pF or Series
EQUIVALENT SERIES RESISTANCE	See Table 1
SHUNT CAPACITANCE	3.5 pF max
DRIVE LEVEL	300 μW max
SHOCK RESISTANCE	±5 ppm max 75 cm drop test in 3 axes onto a hard wood surface
REFLOW CONDITIONS	260°C ±5°C for 10s max

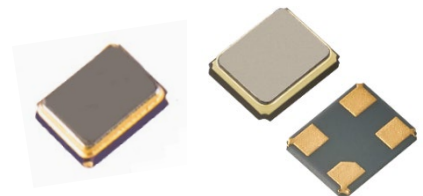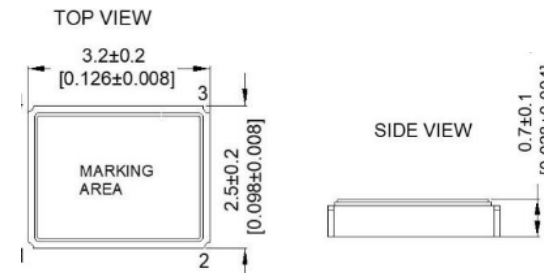

Typical Frequencies:

16 MHz, 26 MHz, 27.12 MHz, 32 MHz, 48 MHz, 64 MHz

[See All Crystal Products](#)

Raltron Solutions - Tuning Fork 32.768 kHz

Raltron is offering 32.768 kHz tuning fork crystals in:

Ceramic Packages:

- 1.2 x 1.0 mm Raltron Tuning Fork Crystal - [RT1210](#)
- 1.6 x 1.0 mm Raltron Tuning Fork Crystal - [RT1610](#)
- 2.0 x 1.2 mm Raltron Tuning Fork Crystal - [RT2012](#)
- 3.2 x 1.5 mm Raltron Tuning Fork Crystal - [RT3215](#)

Plastic Molded Packages:

- 6.9 x 1.4 mm Raltron Tuning Fork Crystal - [RSE H14](#)
- 8.0 x 3.8 mm Raltron Tuning Fork Crystal - [RSM200S](#)

[See All Crystal Products](#)

Load capacitance values: 6 pF, 7 pF, 9 pF and 12.5 pF

Frequency Tolerances: ± 20 ppm and ± 10 ppm

Typical example of IC for Electronic Shelf Label using a 32.768 kHz crystal as frequency reference:

Texas Instruments - CC1352P7

Using 32.768 kHz crystal

CL: 6, 7 or 12 pF


ESR: 90 k Ω max




RT1210 Specifications

PARAMETER	VALUE
NOMINAL FREQUENCY	32.768 kHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C $\pm 3^\circ\text{C}$	± 20 ppm *
FREQUENCY STABILITY OVER TEMPERATURE COEFFICIENT	-0.036 ppm / $^\circ\text{C}^2$ typ
OPERATING TEMPERATURE RANGE	-40°C to +85°C
STORAGE TEMPERATURE RANGE	-55°C to +125°C
AGING AT 25°C $\pm 3^\circ\text{C}$	± 5 ppm first year max
INSULATION RESISTANCE AT 100 VDC	500 M Ω
LOAD CAPACITANCE	6 pF to 12.5 pF
EQUIVALENT SERIES RESISTANCE	90 k Ω max
SHUNT CAPACITANCE	1.4 pF typ
DRIVE LEVEL	0.3 μw max

Internal Lead Connections



Unit: mm

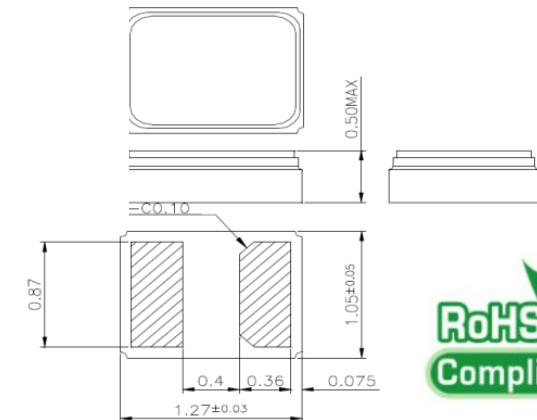


Raltron Solutions - TCXOs and VCTCXOs

Raltron TCXOs IC Solutions

Part #	Size(mm)
RTX-2016AF31-S-16.000-TR	2.0 x 1.6
RTX-2520AF31-S-32.000-TR	2.5 x 2.0
RTX-2520AF31-S-48.000-TR	2.5 x 2.0
RTX-1612AF31-S-48.000-TR	1.6 x 1.2


[See All TCXOs Products](#)

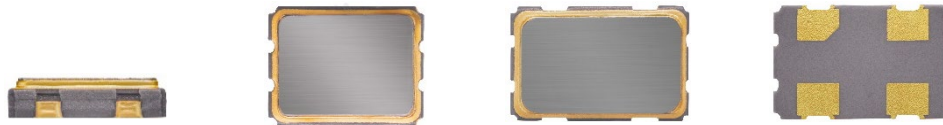


- Tighter Stability: ± 0.5 ppm ~ ± 2.5 ppm, $-40 \sim +85^{\circ}\text{C}$
- Improved Frequency Tuning Characteristic
- Superior Phase Noise Performance (-130 dBc/Hz on the floor)
- Range Supply Voltage: 1.8 V ~ 3.3 V
- Typical Frequencies: 10.0 MHz, 16.0 MHz, 19.2 MHz, 20.0 MHz, 26.0 MHz, 32.0 MHz, 38.4 MHz, 48.0 MHz, 50.0 MHz, 52.0 MHz

SERIES RTX/RTV-2016


PARAMETER	VALUE	
FREQUENCY RANGE	13 ~ 52 MHz	
SUPPLY VOLTAGE	1.8 ~ 3.3 V	
INPUT CURRENT	3.0 mA max	
FREQUENCY STABILITY	vs. TEMPERATURE	$\pm 0.5 \sim \pm 2.5$ ppm
	vs. LOAD ($\pm 10\%$)	± 0.2 ppm max
	vs. SUPPLY VOLTAGE	± 0.2 ppm max
	AGING 1 st YEAR	± 1.0 ppm max
FREQUENCY TOLERANCE at 25°C AFTER 2 REFLAWS	± 2.5 ppm max	
OPERATING TEMPERATURE RANGE ¹	$-40 \sim +85^{\circ}\text{C}$	
STORAGE TEMPERATURE RANGE	$-40 \sim +85^{\circ}\text{C}$	
CLIPPED SINEWAVE OUTPUT VOLTAGE	0.8 VP-P typ	
OUTPUT LOAD	10 k Ω // 10 pF	
START-UP TIME	5 ms max	
FREQUENCY TUNING RANGE ²	$\pm 7 \sim \pm 16$ ppm	
PHASE NOISE at 1 kHz OFFSET	-130 dBc/Hz max	



OUTLINE TOLERANCE
IF NOT SPECIFIED:
 $\pm 0.015^{\circ}0.4$ mm




Pin Connections
1: GND
2: GND
3: OUTPUT
4: Vcc



(Bottom View)

Recommended Solder Pattern



*Add a 1000 pF DC-cut capacitor to the output pad of the TCXO



Raltron Solutions – Antennas



Raltron Antennas Solutions

Part #	SIZE(mm)
RCA-W2-P-3216-A36-G	3.20 x 1.60 x 1.20
RPA-GP-A-16-IPEX-25-G	16 x 16
RCA-3216-A1-TR	3.20 x 1.60 x 1.20
RCA-S-2012-S1-TR	2.00 x 1.25 x 0.85


[See Antenna Products for Bluetooth](#)

[See Antenna Products for NFC](#)


RCA-W2-P-3216-A36-G

PARAMETERS	SPECIFICATIONS	UNIT
Center Frequency	2450	MHz
Band Width, typ	100	MHz
Peak Gain	4.97	dBi
Impedance	50	Ω
VSWR, max	2.0	-
Polarization	Linear	-
Azimuth Beam Width	Omni-directional	-
Operating Temperature Range	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature Range	-40 ~ +85	$^{\circ}\text{C}$


PARAMETERS	VALUES			UNIT
Frequency	2400	2450	2500	MHz
Average Gain	-0.75	-0.79	-0.88	dBi
Peak Gain	4.52	4.97	4.85	dBi
Efficiency	70.2	71.1	71.2	%

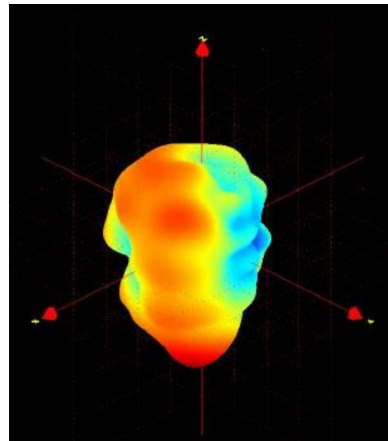

RADIATION PATTERN

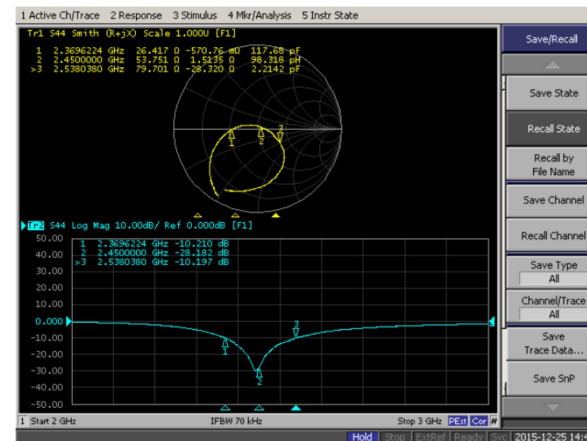

FREQUENCY CHARACTERISTICS

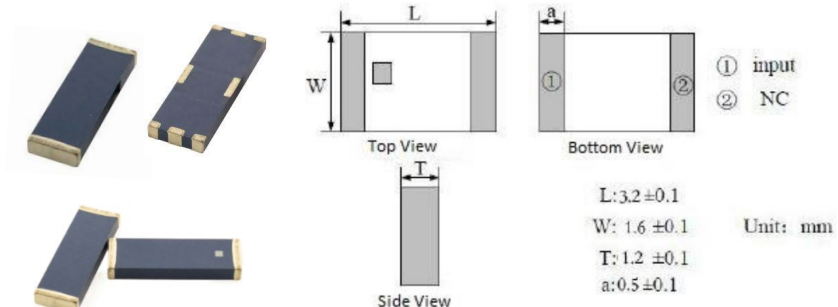

Raltron Products – LTCC Filters, Baluns and Diplexers



Raltron LTCC Filters, Baluns and Diplexers Solutions

Part #	Size(mm)
RCF-5500.000-700000-1005-W-001	1.00 x 0.50
RBL-2430.000-1005-EV-001	1.00 x 0.50 x 0.40
RCDI-24-49-1608-W-TR	1.60 x 0.80 x 0.60
RCDI-W2A1-W5A17-1608-W-TR	1.60 x 0.80 x 0.60

[See All LTCC Filters, Baluns and Diplexers Products](#)

RCDI-W2A1-W5A17-1608-W-TR


PARAMETERS	SPECIFICATIONS		UNIT
Frequency Range	2400 ~2496	5150 ~ 5950	MHz
Insertion Loss, max	0.5		1.0
Attenuation, min	35 @ 4800~5000 MHz	30 @ 70~2000 MHz	dB
	15 @ 7200~7500 MHz	30 @ 2400~2690 MHz	dB
		12 @ 7250~7800 MHz	dB
		25 @ 10300~12000 MHz	dB
	10 @ 15000~18000 MHz	dB	
VSWR, max	1.6		-
Impedance	50		Ω
Operating Temperature Range	-40 ~ +85		$^{\circ}\text{C}$
Moisture Sensitivity Levels	Level 1 (IPC/JEDEC J-STD-020)		-

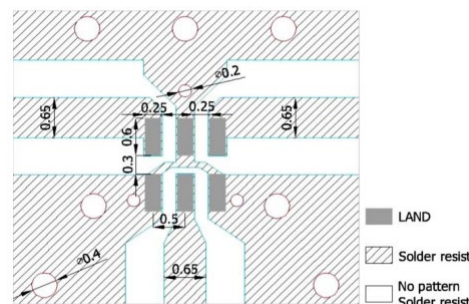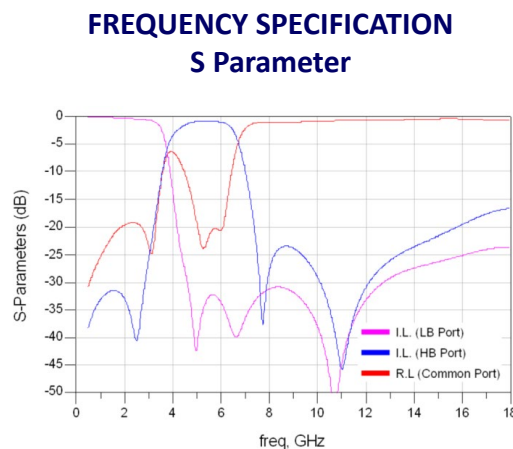

Solder Land Pattern

Unit: mm

Line width to be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

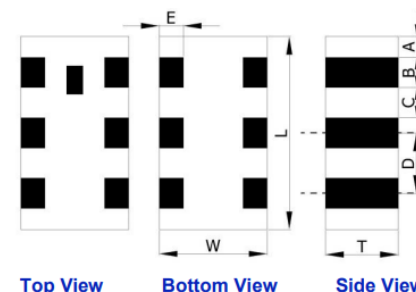

Unit: mm

	L	W	T	A
Dimension	1.60 \pm 0.15	0.80 \pm 0.15	0.60 \pm 0.10	0.175 \pm 0.15
Dimension	B	C	D	E
Dimension	0.25 \pm 0.15	0.25 \pm 0.15	0.50 \pm 0.15	0.20 \pm 0.15



Contact



<http://www.raltron.com>

Raltron Electronics

10400 N.W. 33rd Street

Miami, FL 33172, U.S.A.

Phone: 305 593 6033

Fax: 305 594 3973