


■ ELECTRICAL SPECIFICATION

PARAMETER	SPECIFICATIONS	UNIT
Frequency Range	470 ~ 490	MHz
VSWR, max	1.5	-
Input Impedance	50	Ω
Radiation	Omni-direction	-
Polarization	Vertical	-
Gain	5.5	dBi
Power, max	150	W
Lighting Protection	Direct – current earth	-

■ MECHANICAL SPECIFICATION


PARAMETER	SPECIFICATIONS		UNIT
Length	1200 ± 50		mm
Pedestal Diameter	86		mm
Connector	BNC		-
RF Cable	Type	RG58	-
	Length	3000	mm

■ DIMENSIONS

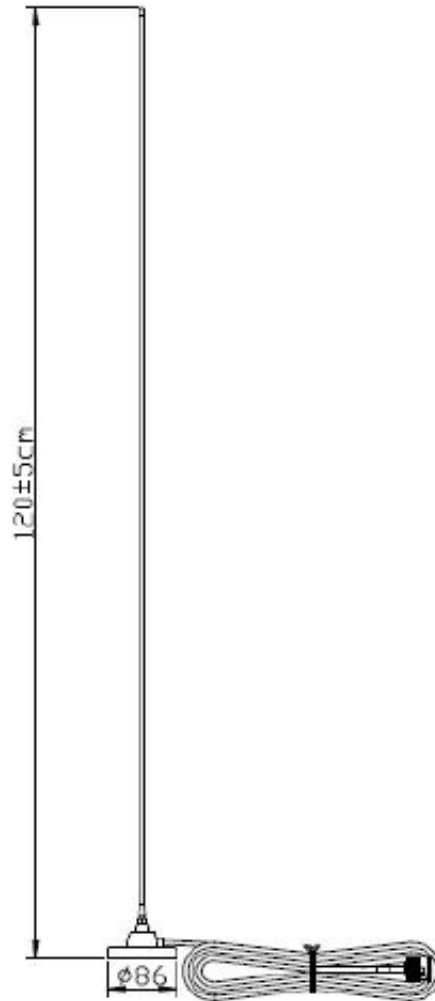

RDP-480-P-1200-BNC-3000-G

■ FREQUENCY CHARACTERISTICS

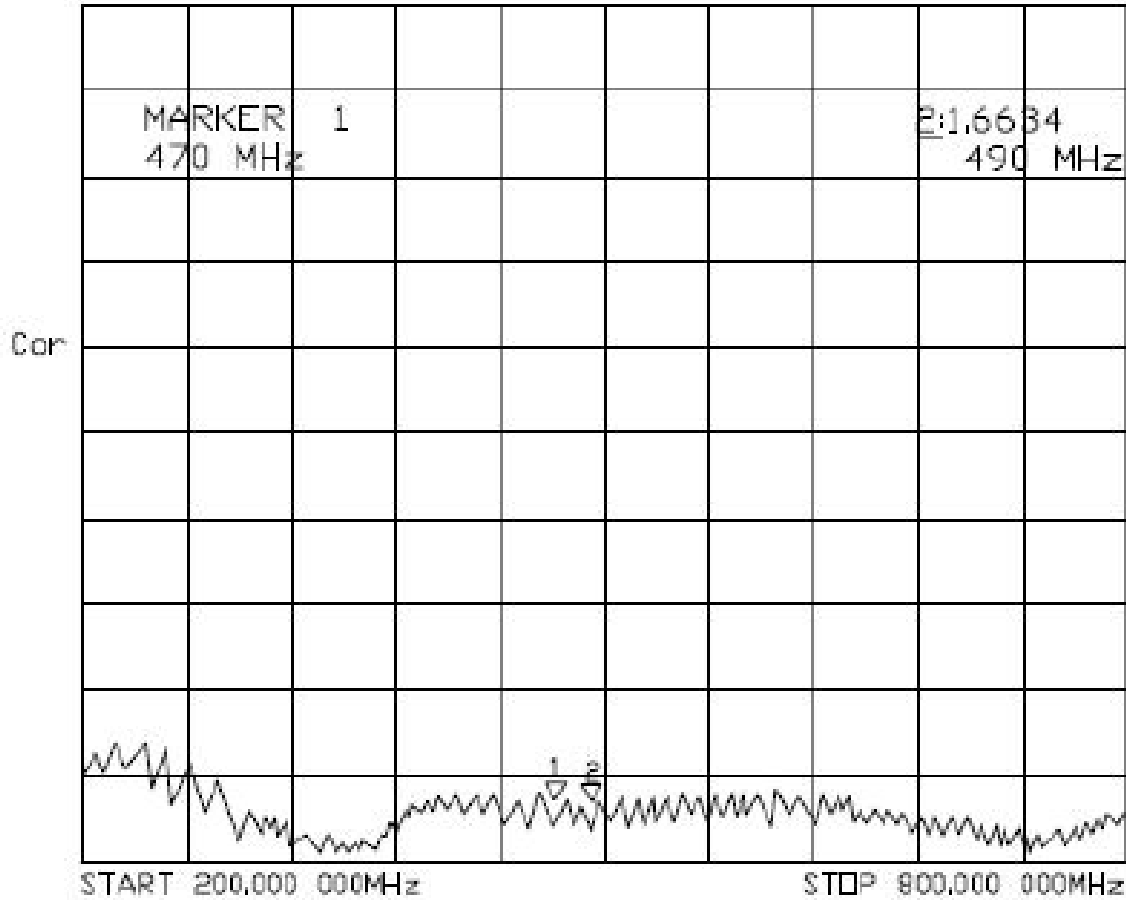

May, 2016