



Items	Specification	Unit
Center frequency(F_o)	922.500	MHz
Insertion Loss ($F_o \pm 2.5$ MHz), typ/max	2.5 / 3.0	dB
Amplitude Ripple ($F_o \pm 2.5$ MHz), typ/max	0.5 / 1.0	dB
VSWR ($F_o \pm 2.5$ MHz), typ/max	1.5 / 2.0	-
Attenuation, min/typ	500 ~ 900 MHz	-40 / -45
	950 ~ 2000 MHz	-40 / -45
In/Out Impedance	50	Ω
Input power, max	10	dBm
DC Voltage, max	10	V
Operating Temperature Range	-40 to +85	$^{\circ}$ C
Storage Temperature Range	-40 to +85	$^{\circ}$ C

Dimension

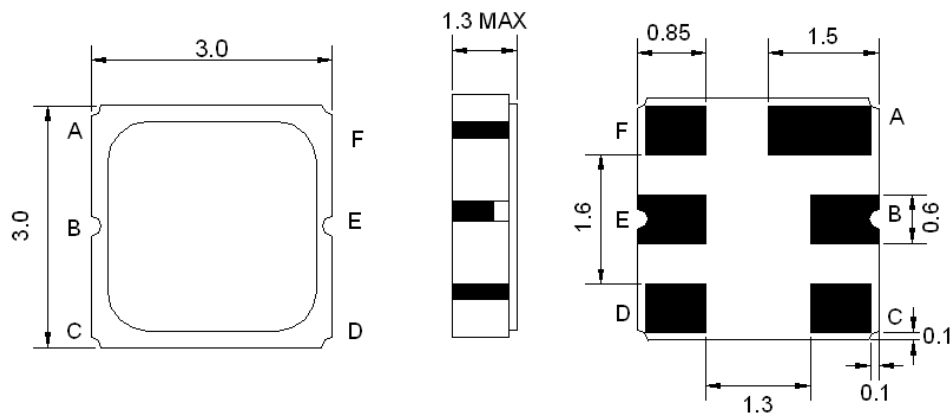

Pin Description	
A, C, D, F	Ground
B	In
E	Out

Frequency Characteristics

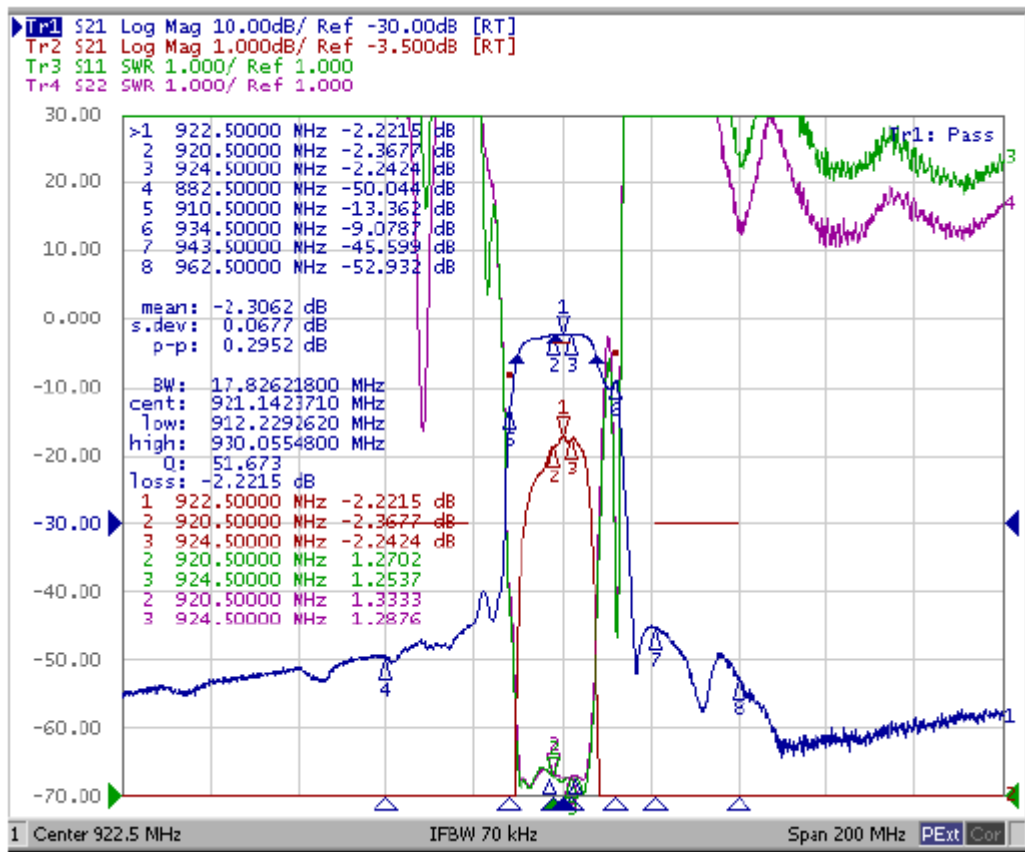

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH – SVHC	Compliant
RoHS 2	6/6

APPROVAL

DRAWN BY	CP, February 03, 2016
APPROVED BY	CP, February 03, 2016
REVISION	A, Initial Release