




❖ ELECTRICAL SPECIFICATION

PARAMETER	VALUE	UNIT
Frequency Range	0 – 3	GHz
Impedance	50	Ω
Working Voltage, max	250	Vrms
Dielectric Withstanding Voltage, max	750	Vrms

❖ DIMENSIONS

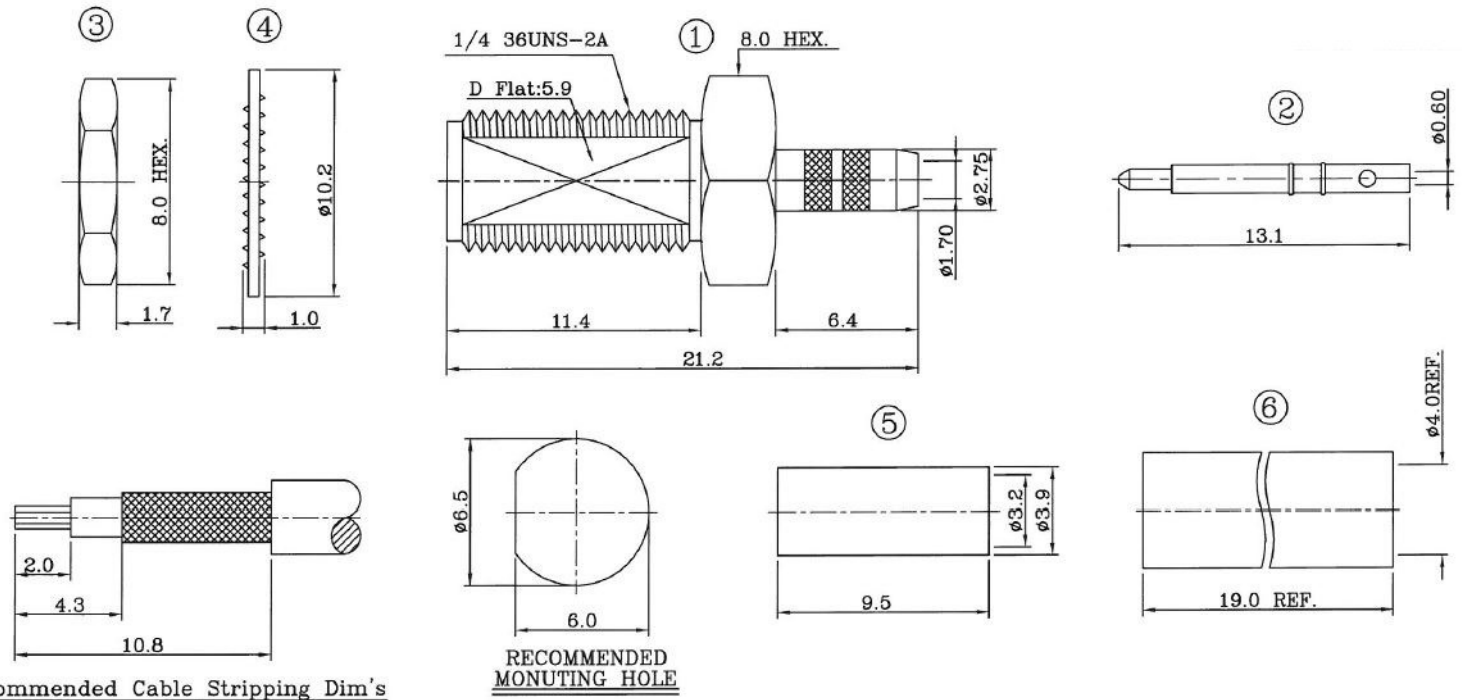

Item	Description	Material	Finished
1	Body	Brass	Gold Flash
	Insulator	Teflon	None
2	Contact	Brass	Gold 3u"
3	Nut	Brass	Gold Flash
4	Washer	Brass	Gold Flash
5	Ferrule	Brass	Gold Flash
6	Heat Shrink Tube	P. E	None

				 A RAMI TECHNOLOGY Company		
Rev	Change	Date	Name			Description
Projection		Scale	Date	Name	RP-SMA STRAIGHT JACK BULKHEAD CRIMP FOR RG174-188-316U CABLE	
 Dimensions in mm		--	Drawn	09.06.2018	AR	Part Number
			Checked	09.06.2018	CP	
		Approved	09.06.2018	CP	RCN-1F-21870-K-001	
						A