


❖ ELECTRICAL SPECIFICATION

PARAMETER		VALUE	UNIT
Frequency Range		0 – 6	GHz
Impedance		50	Ω
Working Voltage, max		335	Vrms
Dialectic Withstanding Voltage, max		1000	Vrms
Insertion Loss	1 GHz	0.1	dB
VSWR, max		1.17	-

❖ DIMENSIONS

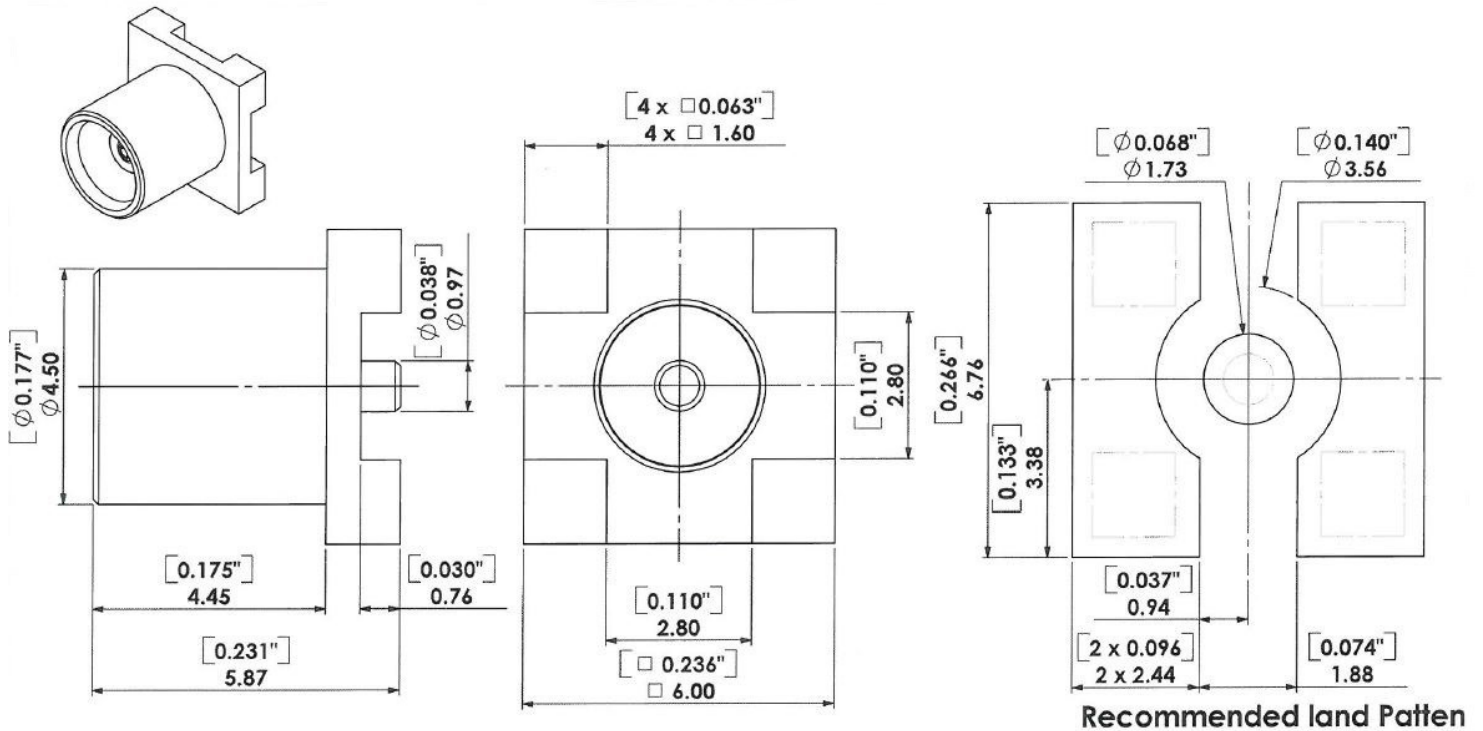

Description	Material	Finished
Body	Brass	Gold
Insulator	Teflon	Natural
Contact	BE. Copper	Gold 30U"

				RALTRON A RAMI TECHNOLOGY Company	
Rev	Change	Date	Name	Description	
				MCX STRAIGHT JACK FOR SMD PCB RECEPTACLE	
Projection		Scale	Date	Name	Part Number
		--	Drawn	09.10.2018	AR
			Checked	09.10.2018	CP
			Approved	09.10.2018	CP
Dimensions in mm				RCN-4F-28013-K-001	
				A	