

GNSS SURVEYING ANTENNA

RDM-MBD5-A-15150615-9-X-001

Page 1 of 3

ELECTRICAL SPECIFICATION

ANTENNA

PARAMETERS		VALUE	UNIT
Frequency Range		GPS: L1	-
		GLONASS: G1	-
		COMPASS: B1	-
		Galileo: E1/L1/E2	-
Polarization		RHCP	-
Axial Radio, max		3	dB
VSWR, max		1.5	-
Peak Gain, min		5.0	dBi
Impedance		50	Ω
Rejection out of Pass Band, min	@ Frequency ±100MHz	40	dBi
Phase Center Error		± 2	mm
Horizontal Coverage Angle		360	0

LNA

PARAMETERS	VALUE	UNIT
Gain	40 ± 2	dB
Noise Figure, max	1.5	dB
Passband Fluctuation	± 1.5	dB
Supply Voltage	3 ~ 12	V DC
Current Consumption, max	40	mA
VSWR, max	2	-

MECHANICAL & ENVIRONMENTAL

PARAMETERS	VALUE	UNIT
Connector	TNC-K	-
Radome Material	ABS	-
Operating Temperature Range	-40 ~ + 85	°C
Relative Humidity, max	95	%
Ingress Protection (Exclude Air Vent in Screw Hole)	IP67	-
Mounting Method	Screw	-
Environmentally Friendly	RoHS Compliant	-




GNSS SURVEYING ANTENNA

RDM-MBD5-A-15150615-9-X-001


Page 2 of 3

MECHANICAL SPECIFICATION

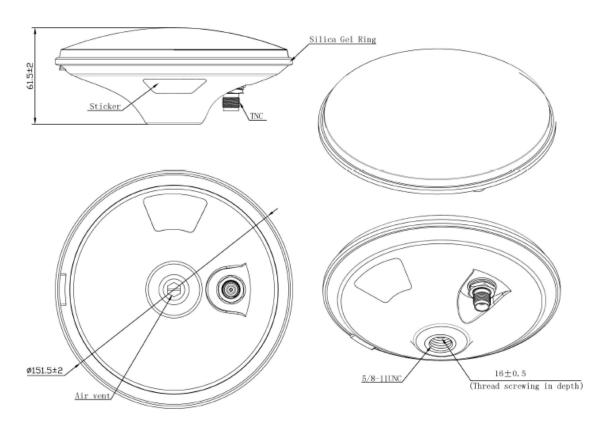

Unit:mm

ANTENNA REFERENCE POINT & PHASE CENTER

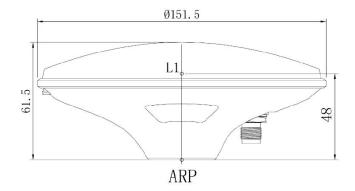

Mechanical Offsets Units in "mm"



GNSS SURVEYING ANTENNA RDM-MBD5-A-15150615-9-X-001

Page 3 of 3

APPROVAL

RALTRON		
DRAWN BY:	AR, July 10, 2019	
APPROVED BY:	CP, July 10, 2019	
REVISION:	A, Initial Release	
	B, AR, July 18, 2019	
	Added Rejection out of Pass Band	



Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is contained personable effort to ensure that the information is provided for reference purposes only and is subject to change, received in or every expension, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.