

## OCXO SERIES 4000

### ■ FEATURES

Excellent frequency stability  
Mechanical / Electrical frequency adjustment available

### APPLICATIONS

- SATCOM  
- BASE STATIONS  
- TEST INSTRUMENTS

### ■ ELECTRICAL PERFORMANCE


PARAMETER	OCXO SERIES 4000	
	AT CUT CRYSTAL	SC CUT CRYSTAL
Supply voltage, nom.	15V, 12V, 5V $\pm 5\%$ Standard	
Power dissipation steady state	2.5 Watt Max.	
Heat up power	5 Watt Max	
Heat up time.	7 min Max	
Frequency range	1 To 160 MHz Standard	
Frequency Adjustment: Electrical (0 to 5V) Electrical (0 to 10V) Mechanical	$\pm 10$ PPM Min $\pm 15$ PPM Min $\pm 1.5$ PPM Min	$\pm 0.7$ PPM Min $\pm 1$ PPM Min $\pm 0.6$ PPM Min
Freq. stability vs. temperature LX: 0°C to 60°C FZ: -30°C to 70°C	$\pm 0.05$ PPM $\pm 0.1$ PPM	$\pm 0.002$ PPM $\pm 0.005$ PPM
	(Standard, contact factory for different temp ranges and stabilities)	
Freq. stability vs. supply changes	$\pm 0.005$ PPM Max for $\pm 5\%$ Change	$\pm 0.002$ PPM Max for $\pm 5\%$ Change
Freq. stability vs. load changes	$\pm 0.005$ PPM Max for $\pm 5\%$ Change	$\pm 0.001$ PPM Max for $\pm 5\%$ Change
Long term stability (Aging)	$\pm 1.5$ PPM Max for 10 Years $\pm 0.3$ PPM Max for 1 Years $\pm 0.002$ PPM/Day Max.	$\pm 0.6$ PPM Max for 10 Years $\pm 0.05$ PPM Max for 1 Years $\pm 0.0005$ PPM/Day Max.
Output	HCMOS/TTL/Sine 0 to +13dBm	
Harmonics, Sub Harmonics	-30dBc(Sine Output)	
Spurious	-75dBc(Sine Output)	
Duty cycle	40/60% to 60/40%(HCMOS)	
Rise / fall time	10nS Max. (HCMOS,10%~90%Vout, 90%~10%Vout)	
Short term Stability (10MHz)	1 E-10 /Sec	5 E-11 /Sec
Phase Noise typical under static conditions (Sine Output 10MHZ)	Offset    Phase Noise 10Hz      -95 dBc/Hz 100Hz     -125 dBc/Hz 1000Hz    -135 dBc/Hz 10000Hz   -150 dBc/Hz	Offset    Phase Noise 10Hz      -115 dBc/Hz 100Hz     -135 dBc/Hz 1000Hz    -145 dBc/Hz 10000Hz   -150 dBc/Hz

Note: All Typical parameters for a 10MHz output and 5V Supply, for different frequencies consult factory

■ HOW TO ORDER (PART NUMBER)

Prefix	Output Type	Control Voltage	Series	Revision	Temperature Range	Stability	Frequency	Supply Voltage
OX	4:LVC MOS 6:SINE	1: No Control Voltage 5: Control Voltage	4X:4000 40: Height= 1"/25.4mm 41: Height= 2"/50.8mm 42: Height= 4"/101.6mm 44~49: Odd Height	A	First letter Lowest Temperature, Second letter Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C steps Example: LZ: +0°C to +70°C LX: +0°C to +60°C FZ: -30°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in ppm  Example 28=0.28 ppm 10=0.1 ppm	In MHZ	5: 5V 12; 12V 15; 15V

Example:

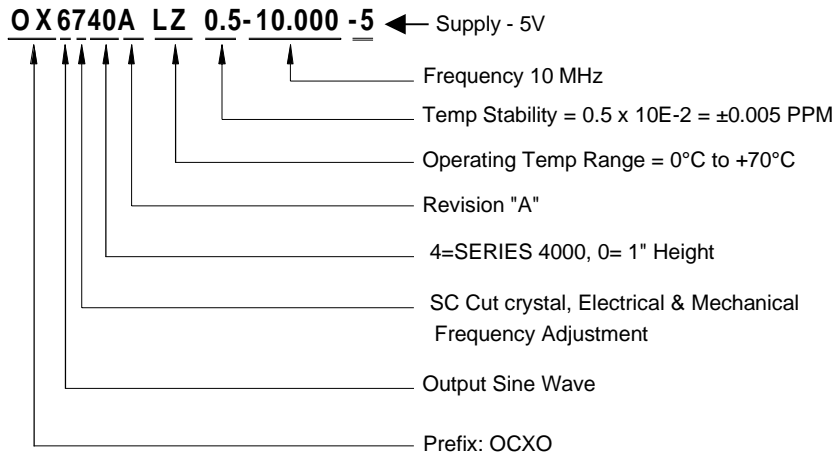

■ MECHANICAL SPECIFICATION

