



Items		Specification	Unit
Center frequency(F_0)		173.225	MHz
Bandwidth @-3dB, typ		134	kHz
Bandwidth @-10dB, typ/max		192 / 200	kHz
Insertion Loss (within $F_0-7.5\sim F_0+31$ kHz) typ / max		3.0 / 3.6	dB
Ripple in Pass Band (within $F_0-7.5\sim F_0+31$ kHz) typ/max		0.6 / 1.0	dB
Attenuation	163.225 ~ 172.305 MHz, min/typ	-50 / -54	dB
	174.145 ~ 183.225 MHz, min/typ	-45 / -52	dB
Aging, max		± 10	ppm/year
Input power, max		20	dBm
DC Voltage, max		10	V
Operating Temperature		-40 to +85	$^{\circ}\text{C}$
Storage Temperature		-40 to +85	$^{\circ}\text{C}$

Dimension

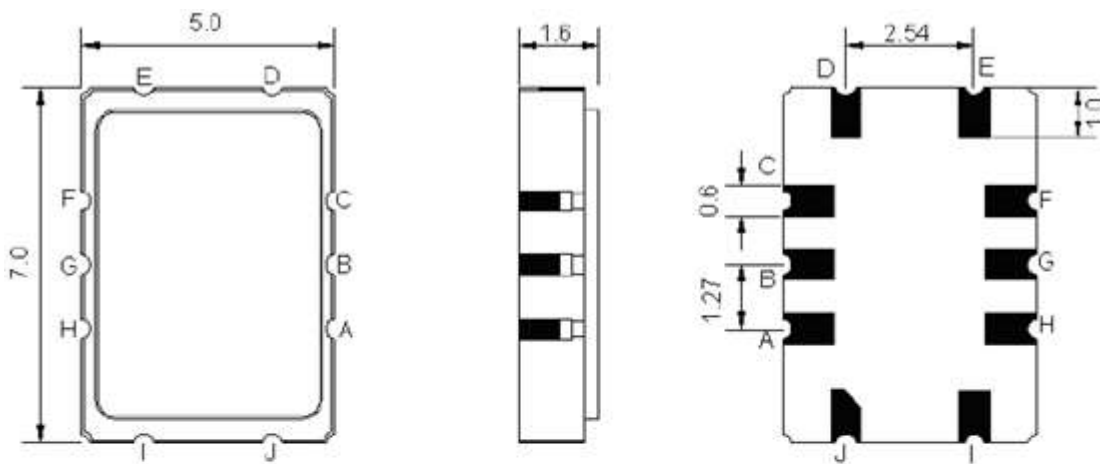


Pin Description	
A,B,C,F,G,H	Ground
I	Ground
J	Input
D	Ground
E	Output

Frequency Characteristics

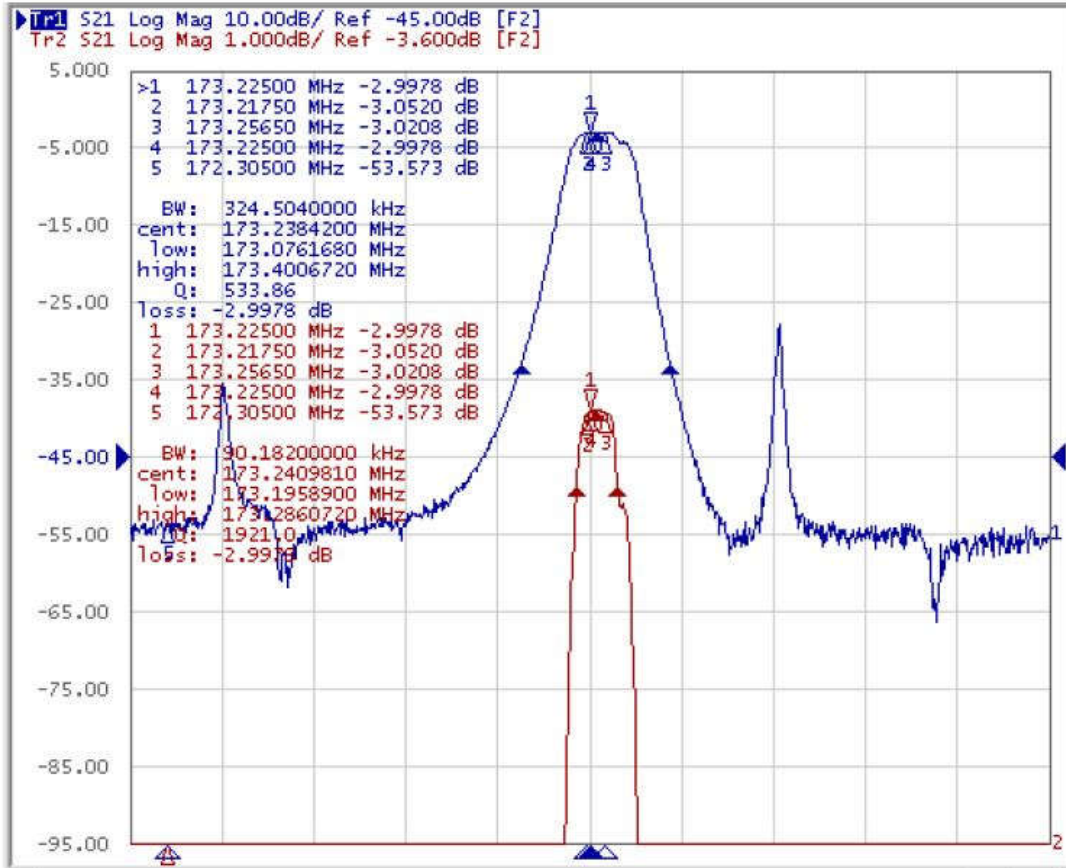

REFLOW PROFILE

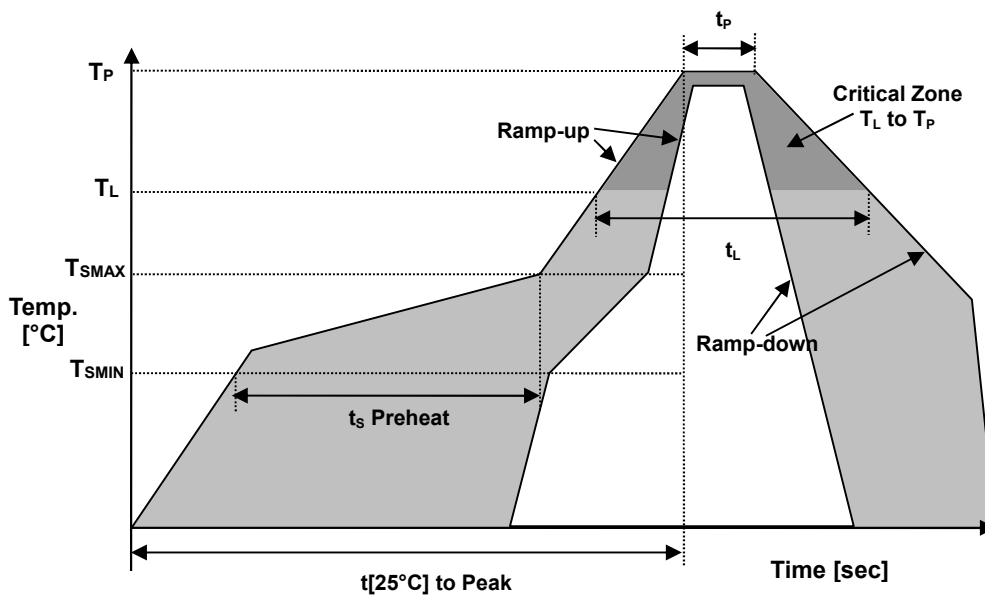

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25°C]$ to Peak Temperature	$t[25°C]$ to Peak	480 sec.
Time	t_L	60-150 sec.

● **ENVIRONMENTAL**

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS-2	6/6 COMPLIANT & LEAD FREE
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



April 2016