



Items		Specification	Unit
Nominal Frequency (fo)		284.000	MHz
Pass Bandwidth		8000	kHz
Insertion Loss in BW		4.5	dB Max
Passband Ripple in BW		2.0	dB Max
Absolute Attenuation	184 MHz ~ 246.5 MHz	48	dB min
	321.5 MHz ~ 384 MHz	48	dB min
DC Voltage, maximum		10 VDC	
Input Power, maximum		10 dBm	
Terminating Impedance		150Ω	
Operation Temperature		-40°C to +85°C	
Storage Temperature		-40°C to +85°C	

Dimension

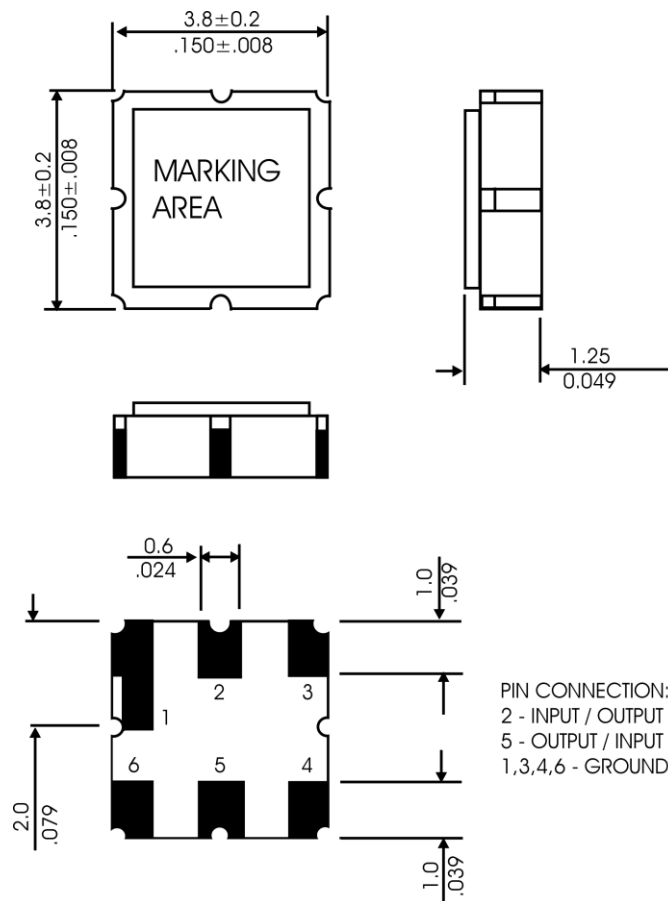

Typical Frequency Response

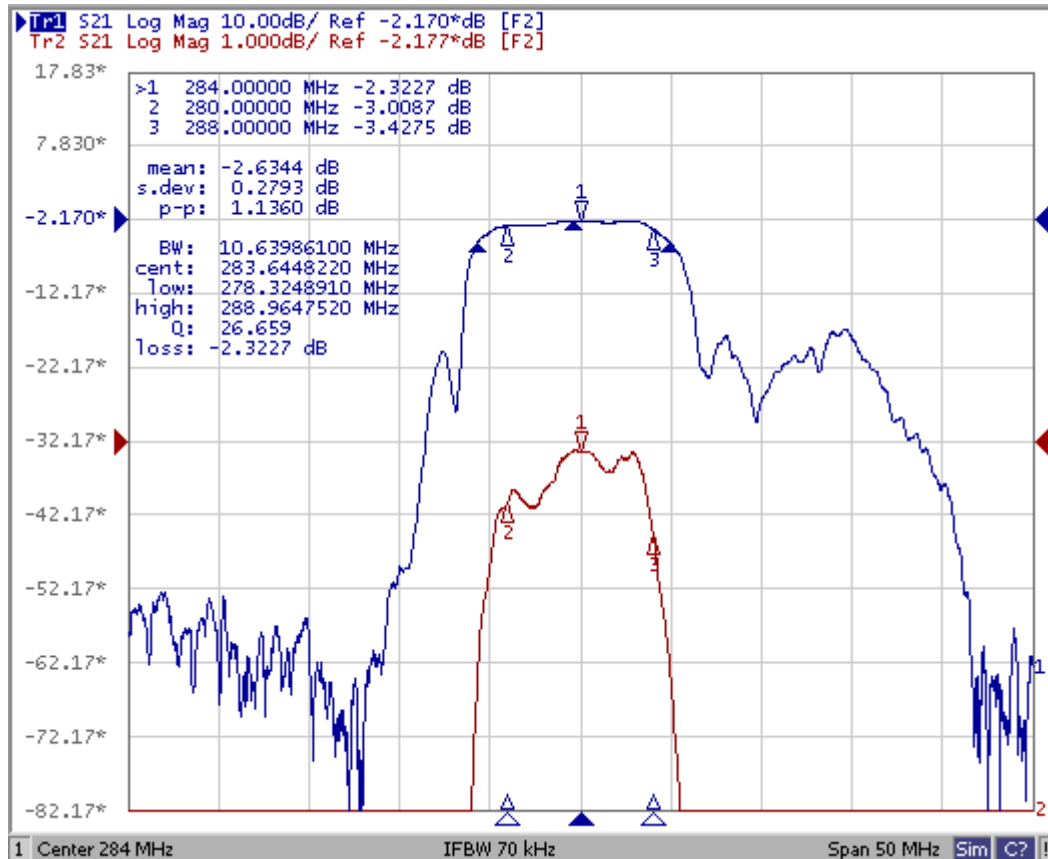

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
TERMINATION FINISH	Au
REACH – SVHC	Compliant
RoHS 2	6/6
PACKAGING	TAPE & REEL



APPROVAL

DRAWN BY	F. Parra, 15 December 2015
APPROVED BY	F. Parra, 15 December 2015
REVISION	A, Initial Release

Raltron Electronics/RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless

RALTRON ELECTRONICS ■ 10400 N.W. 33rd Street ■ Miami, Florida 33172 ■ U.S.A.
 Tel: 305-593-6033 ■ Fax: 305-594-3973 ■ e-mail: sales@raltron.com ■ internet: http://www.raltron.com



A **RAMI TECHNOLOGY** Company

**RF SAW BANDPASS FILTER
RSF-284.000-8000-3838-TR**

against all damages.

page 3 of 3